

Multimedia Outlets

Ref. 5240, 5247, 5248 y 5249

Description

New range of multimedia outlets with **CATV operators** specifications.

- Easy mounting thanks to the **lateral opening clamp** and the inner conductor fit by a simple **click**.
- High reliability because of its **fully automated** production.
- **DOCSIS 3.0** Ready
- **High rejection TV-DATA**.
- Band from 5 up to 1.300MHz
- According to the European Directives (1) 2004/108/CE (EMC) and 73/23 /CEE (LVD) - 93/ 68/CEE

(1) For the evaluation of these directives the following standards are used:


Electromagnetic Compatibility Standards:

EN 50083-2:2001 Cabled distribution systems for television and sound signals. Electromagnetic compatibility for equipment.

Electrical Safety Standards:

EN 60728-11:2005 Cable networks for television signals, sound signals and interactive services. Safety.

Connections

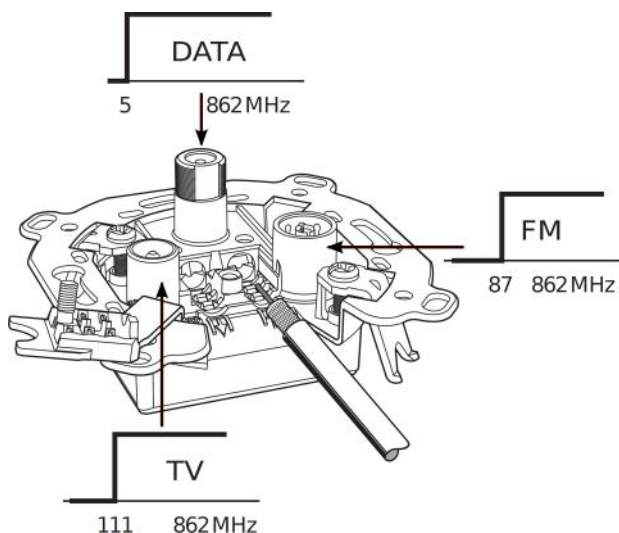

Reference and description

Ref.	Description	EAN Code
5240	End outlet	8424450133583
5247	12dB pass-through outlet	8424450133590
5248	17dB pass-through outlet	8424450133606
5249	22dB pass-through outlet	8424450133613




Technical Specifications

Reference			5240	5247
Type			Final	CP12
Attenuation	IN-OUT	5-862MHz	-	3,7
	IN-TV	111-862MHz	8	12
	IN-DATA	5-862MHz	3,6	12,5
	IN-RADIO	87-108MHz	7	14,5
Isolation	OUT-TV/R/D	5-65MHz/V/U	-	>30/>30/>30
	DATA-TV		>70/>30/>30	>70/>40/>40

Reference			5248	5249
Type			CP17	CP22
Attenuation	IN-OUT	5-862MHz	1,8	0,8
	IN-TV	111-862MHz	19	23,5
	IN-DATA	5-862MHz	17,5	22,5
	IN-RADIO	87-108MHz	20	23
Isolation	OUT-TV/R/D	5-65MHz/V/U	>30/>30/>30	
	DATA-TV		>70/>45/>45	>70/>50/>50

Block diagram

End outlet

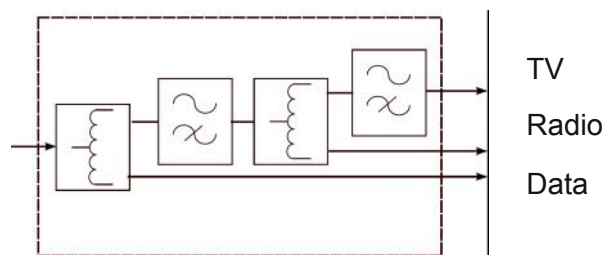

Pass-through outlet

