



High-gain mast amplifier (LTE700, 2nd Digital Dividend) 4 inputs: FM- BIII/DAB-UHF-UHF

Masthead amplifier for the amplification of terrestrial television signals coming from several antennas.

Equipped with 4 inputs, with amplification on all bands. The amplifier is powered through the output coaxial cable with 24 Vdc.

RED compliant.

Ref.	535820
EAN13	8424450215012

Other features

Colour	Orange
---------------	--------

Packaging info

Box	1 pcs.
Carton	5 pcs.

Physical data

Net weight	365.00 g
Gross volume	0.92 dm ³
Gross weight	365.00 g
Width	126.00 mm
Height	136.00 mm
Depth	40.00 mm
Main product weight	363.00 g

Highlights

- Independent amplification for each individual band
- Manually-adjusted high-gain
- EasyF connection system
- Fully automated manufacturing, subject to the most stringent quality controls
- High-screening Zamak chassis
- LTE700/5G filter to remove mobile phone interference
- ON/OFF switch to allow DC pass towards one of the UHF input for the powering of a BOSS system
- Easy mounting. Equipped with a plastic tie for mast mounting
- Resistant ABS-plastic orange case for outdoor installation
- Durability and UV resistance of plastic parts, validated under the ISO 4892-3:2016 standard

Discover

EasyF connection system: simplicity and savings

EasyF is an innovative connection concept where the inner conductor of the coaxial cable is directly inserted in the device, thus improving connection reliability. Thanks to the absence of F connectors, the chassis can be reduced and the connection of two cables secured with a single screw.

- Real time savings: speeding the installation is possible without the need for coaxial cable termination. Furthermore, there is no need for screwing the connectors on the device, which is sometimes difficult when there is little room
- Connection reliability: the clamp holding the cables prevents the coaxial cable to come off
- Cost savings: no additional connectors are required (neither F nor IEC)
- Space optimization: inputs and outputs are always on the same side of the device to prevent coaxial cables from bending, and to make working inside cabinets and register boxes easier
- Very easy three-step mounting: only screwing and unscrewing the covers is required to connect both cables:

1. Unscrew the device's cover to access the connection


2. Insert the previously stripped coaxial cables
3. Close the cover and screw to ensure connection

Learn more about EasyF system reliability

With EasyF, the connection between the coaxial cable and the device is carried out using an automated system for contact insertion of the inner conductor, without any soldering.

- Always as new: the device's operating life increases when the factor of solder wearing out with time is removed
- Failure rate reduction: usually produced as a result of cold soldering joints
- Electromagnetic behaviour optimization: for high frequencies

Application example

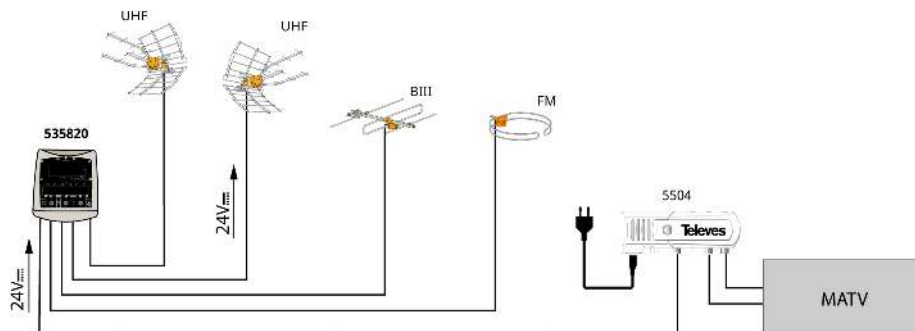

Technical specifications : Ref. 535820

Bands		FM	HighVHF	UHF
Frequency range	MHz	88 ... 108	174 ... 254	470 ... 694
Gain	dB	15	32	36
Gain adjustment range	dB	0 ... 20	0 ... 20	0 ... 20
Output level DIN45004B	dBmV	55	55	56
Output level EN60728-3 IMD3 2tones -35dB	dBmV	62	62	63
Output level EN60728-3 IMD3 2tones -60dB	dBmV	52	52	53
Noise figure	dB	--	4	9
Number of inputs		4		
Inputs/Bands		FM	HighVHF/DAB	UHF 1
Max current input	mA	0	0	45
Powering	Vdc	24		
Current consumption	mA	80		
Protection index (IP)		23		
Operating temperature	°F	23 ... 113		