



MiniKom F broadband multiband amplifier 2 inputs: VHF/UHF-SAT (Terrestrial mix)

2-input multiband amplifier (VHF/UHF-SAT) for SMATV systems. Amplifies the SAT band and mixes it with the terrestrial band (VHF/UHF) with low through losses.

Ref.	5363
Logical ref.	EV45
EAN13	8424450053638

Other features

Plug type EU plug

Packaging info

Box 1 pcs.

Bucket 33 pcs.

Physical data

Net weight 888.00 g

Gross volume 1.90 dm³

Gross weight 888.00 g

Width 185.00 mm

Height 114.00 mm

Depth 64.00 mm


Main product weight 828.00 g

Highlights

- PIN diode technology SAT attenuator

- Power selection switch for LNB: local or remote. In local mode, both band and polarity can be configured using another two switches.
- High-screening Zamak chassis
- "F" connectors
- SAT equalizer
- Output signal LED indicator
- Test output (-30 dB)
- Can be wall-mounted using screws

Application example

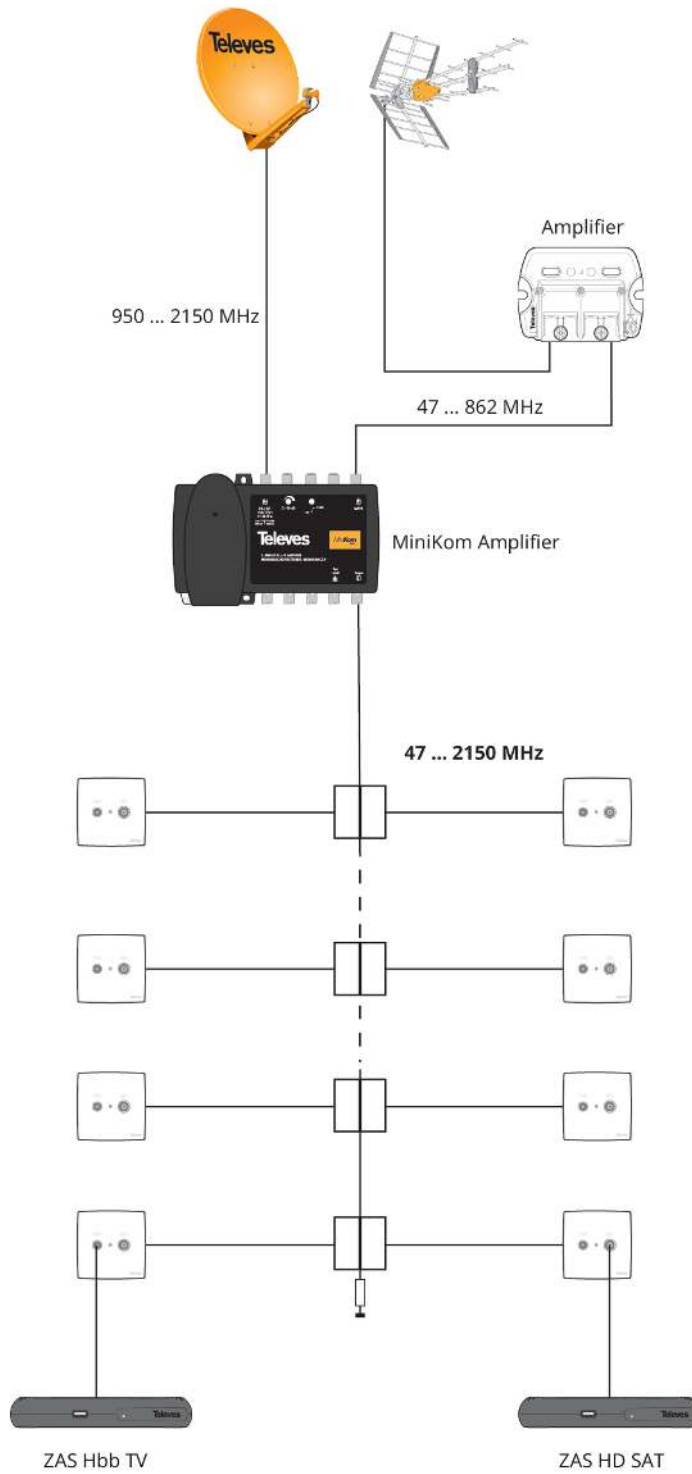

Technical specifications : Ref. 5363

Bands		MATV	SAT
Frequency range	MHz	47 ... 862	950 ... 2150
High gain	dB	-1.5	48
Low gain	dB	-1.5	39
Gain adjustment range	dB	--	0 ... 30
Output level DIN VDE0855/12	dBmV	--	62
Equalizator	dB	--	0 ... 15
Powering LNB - Local	Vdc		12
Max. local current for LNB	mA		300
Powering LNB - Remote	Vdc		12
Max. remote current for LNB	mA		500
Max. power consumption	W		10
Max. current	mA		190
Input voltage	Vac		110 ... 230
Mains frequency			50 Hz / 60 Hz
Number of inputs			2
Number of outputs			1
Connectors			"F" type
Operating temperature	°F		23 ... 113
Protection index (IP)			20