



MiniKom F broadband multiband amplifier 2 inputs: VHF/UHF-SAT (Terrestrial mix)

2-input multiband amplifier (VHF/UHF-SAT) for SMATV systems. Amplifies the SAT band and mixes it with the terrestrial band (VHF/UHF) with low through losses.

Ref.	5363
Logical ref.	EV45
EAN13	8424450053638

Other features

Plug type	EU plug
-----------	---------

Packaging info

Box	1 pcs.
Bucket	33 pcs.

Physical data


Net weight	888.00 g
Gross volume	1.90 dm ³
Gross weight	888.00 g
Width	185.00 mm
Height	114.00 mm
Depth	64.00 mm
Main product weight	828.00 g

Highlights

- PIN diode technology SAT attenuator

- Power selection switch for LNB: local or remote. In local mode, both band and polarity can be configured using another two switches.
- High-screening Zamak chassis
- "F" connectors
- SAT equalizer
- Output signal LED indicator
- Test output (-30 dB)
- Can be wall-mounted using screws

Application example

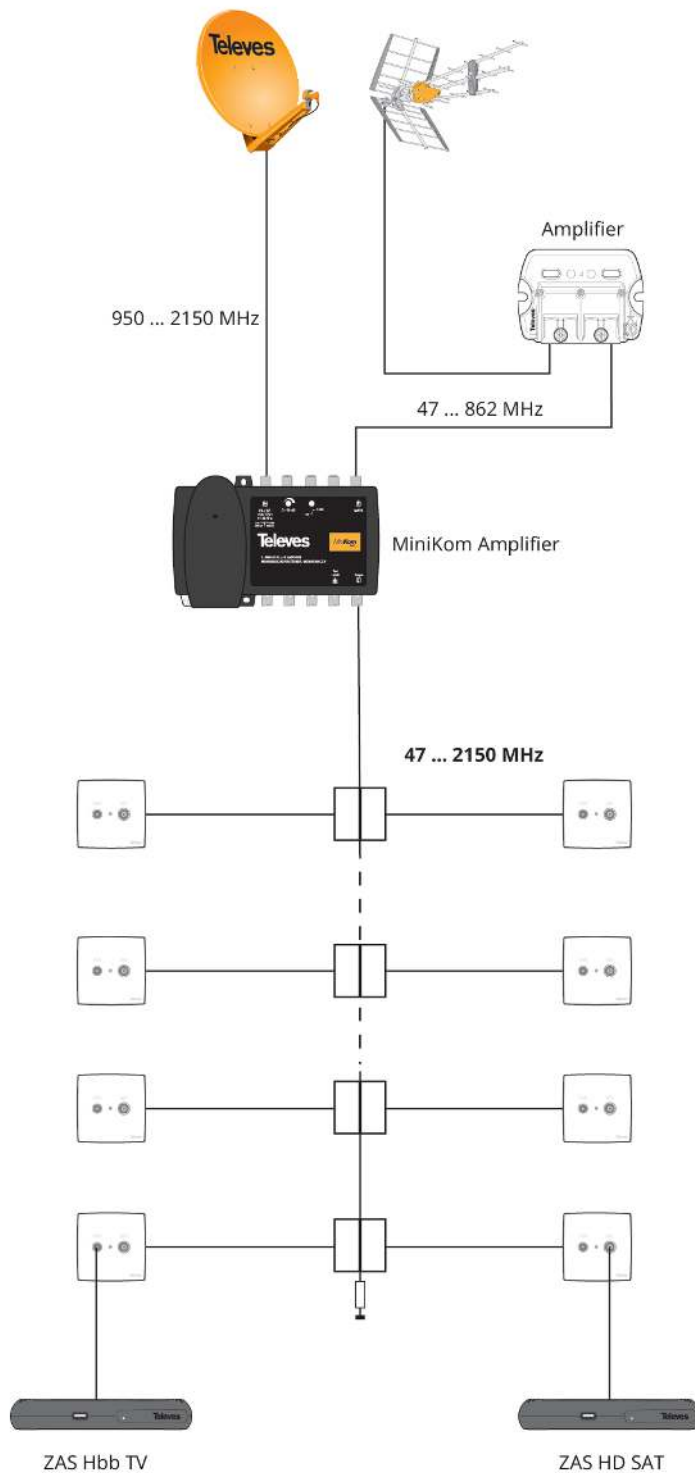

Technical specifications : Ref. 5363

Bands		MATV	SAT
Frequency range	MHz	47 ... 862	950 ... 2150
High gain	dB	-1.5	48
Low gain	dB	-1.5	39
Gain adjustment range	dB	--	0 ... 30
Output level DIN VDE0855/12	dBmV	--	62
Equalizer	dB	--	0 ... 15
Powering LNB - Local	Vdc	12	
Max. local current for LNB	mA	300	
Powering LNB - Remote	Vdc	12	
Max. remote current for LNB	mA	500	
Max. power consumption	W	10	
Max. current	mA	190	
Input voltage	Vac	110 ... 230	
Mains frequency		50 Hz / 60 Hz	
Number of inputs		2	
Number of outputs		1	
Connectors		"F" type	
Operating temperature	°F	23 ... 113	
Protection index (IP)		20	