



24V-5A Power supply for several T.OX modules, 196-264Vac

Flyback-type, high-power and high-performance (>85%) switched-mode power supply. Provides 5 A at 24 V (120 W).

Ref.	5629
Logical ref.	UPSU120
EAN13	8424450139295

Packaging info

Box	1 pcs.
------------	--------

Physical data

Net weight	1,471.00 g
Gross volume	3.40 dm ³
Gross weight	1,471.00 g
Width	71.00 mm
Height	219.00 mm
Depth	165.00 mm
Main product weight	1,383.00 g


Highlights

- Equipped with two outputs monitored by LED diodes that indicate the status of the provided voltages
- Overload and short-circuit detection
- Maximum current limited to 4 A per output


- Equipped with protection against output-voltage variation

Application example

Rack mount.

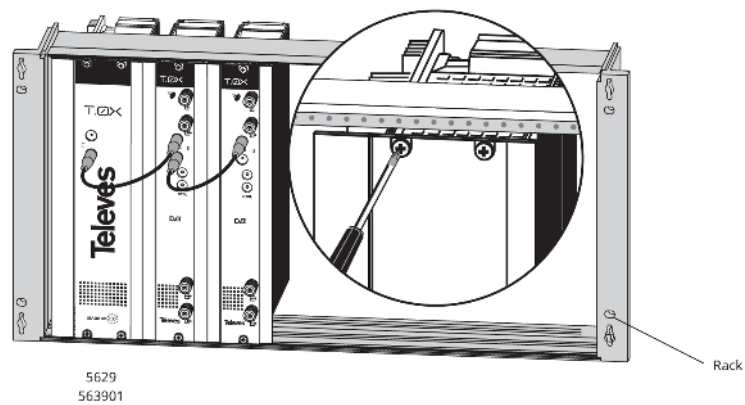

Graphic documentation

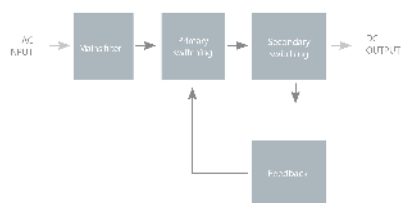

Block diagram

Technical specifications : Ref. 5629

Plug type		EU
Input voltage	Vac	196 ... 264
Mains frequency		50 Hz / 60 Hz
Max. power	W	140
Output voltage	Vdc	24
Max. output current	A	5
Max. output power	W	120
Operating temperature	°F	23 ... 113
Protection index (IP)		20