



## T100 16 VATc coaxial cable Eca Euroclass, A Class shielded

RG-6 coaxial cable with copper inner conductor and aluminium braid (Cu/Al), and an excellent braid coverage (77%). A 16 VATc cable with double shielded and Polyvinyl chloride (PVC) sheath.

|                     |               |
|---------------------|---------------|
| <b>Ref.</b>         | 212602        |
| <b>Logical ref.</b> | T100B/250     |
| <b>EAN13</b>        | 8424450137574 |

### Other features

|               |          |
|---------------|----------|
| <b>Colour</b> | Black    |
| <b>Length</b> | 250.00 m |

### Packaging info

|               |        |
|---------------|--------|
| <b>Reel</b>   | 250 m  |
| <b>Pallet</b> | 7500 m |

### Physical data

|                            |                      |
|----------------------------|----------------------|
| <b>Net weight</b>          | 42.00 g              |
| <b>Gross volume</b>        | 0.07 dm <sup>3</sup> |
| <b>Gross weight</b>        | 42.00 g              |
| <b>Width</b>               | 6.00 mm              |
| <b>Height</b>              | 1,000.00 mm          |
| <b>Depth</b>               | 6.00 mm              |
| <b>Main product weight</b> | 38.00 g              |

### Highlights

- Copper inner conductor and aluminium braid
- Class A shielded
- Eca Euroclass

## Discover

---

### Double-shielded Class A coaxial cable

With 2 shielding layers, these cables provide an outstanding shielding thanks to a high-coverage braid.

They belong in EN 50117 standard Class A, according to their structural properties:

- For 5 MHz - 30 MHz =>  $TI < 5 \text{ m}\Omega/\text{m}$
- For 30 MHz - 1000 MHz =>  $SA > 85 \text{ dB}$
- For 1000 MHz - 2000 MHz =>  $SA > 75 \text{ dB}$
- For 2000 MHz - 3000 MHz =>  $SA > 65 \text{ dB}$

Where the transfer impedance (TI) defines how effective the shielding is at low frequencies, while the shielding attenuation (SA) defines it in the 30 MHz-to-3000 MHz range.

## Mounting details

---

### DETAIL VIEW OF THE COAXIAL CABLE SECTION


**A**-Inner conductor

**B**-Dielectric

**C**-Foil

**D**-Braid

**E**-Outer sheath

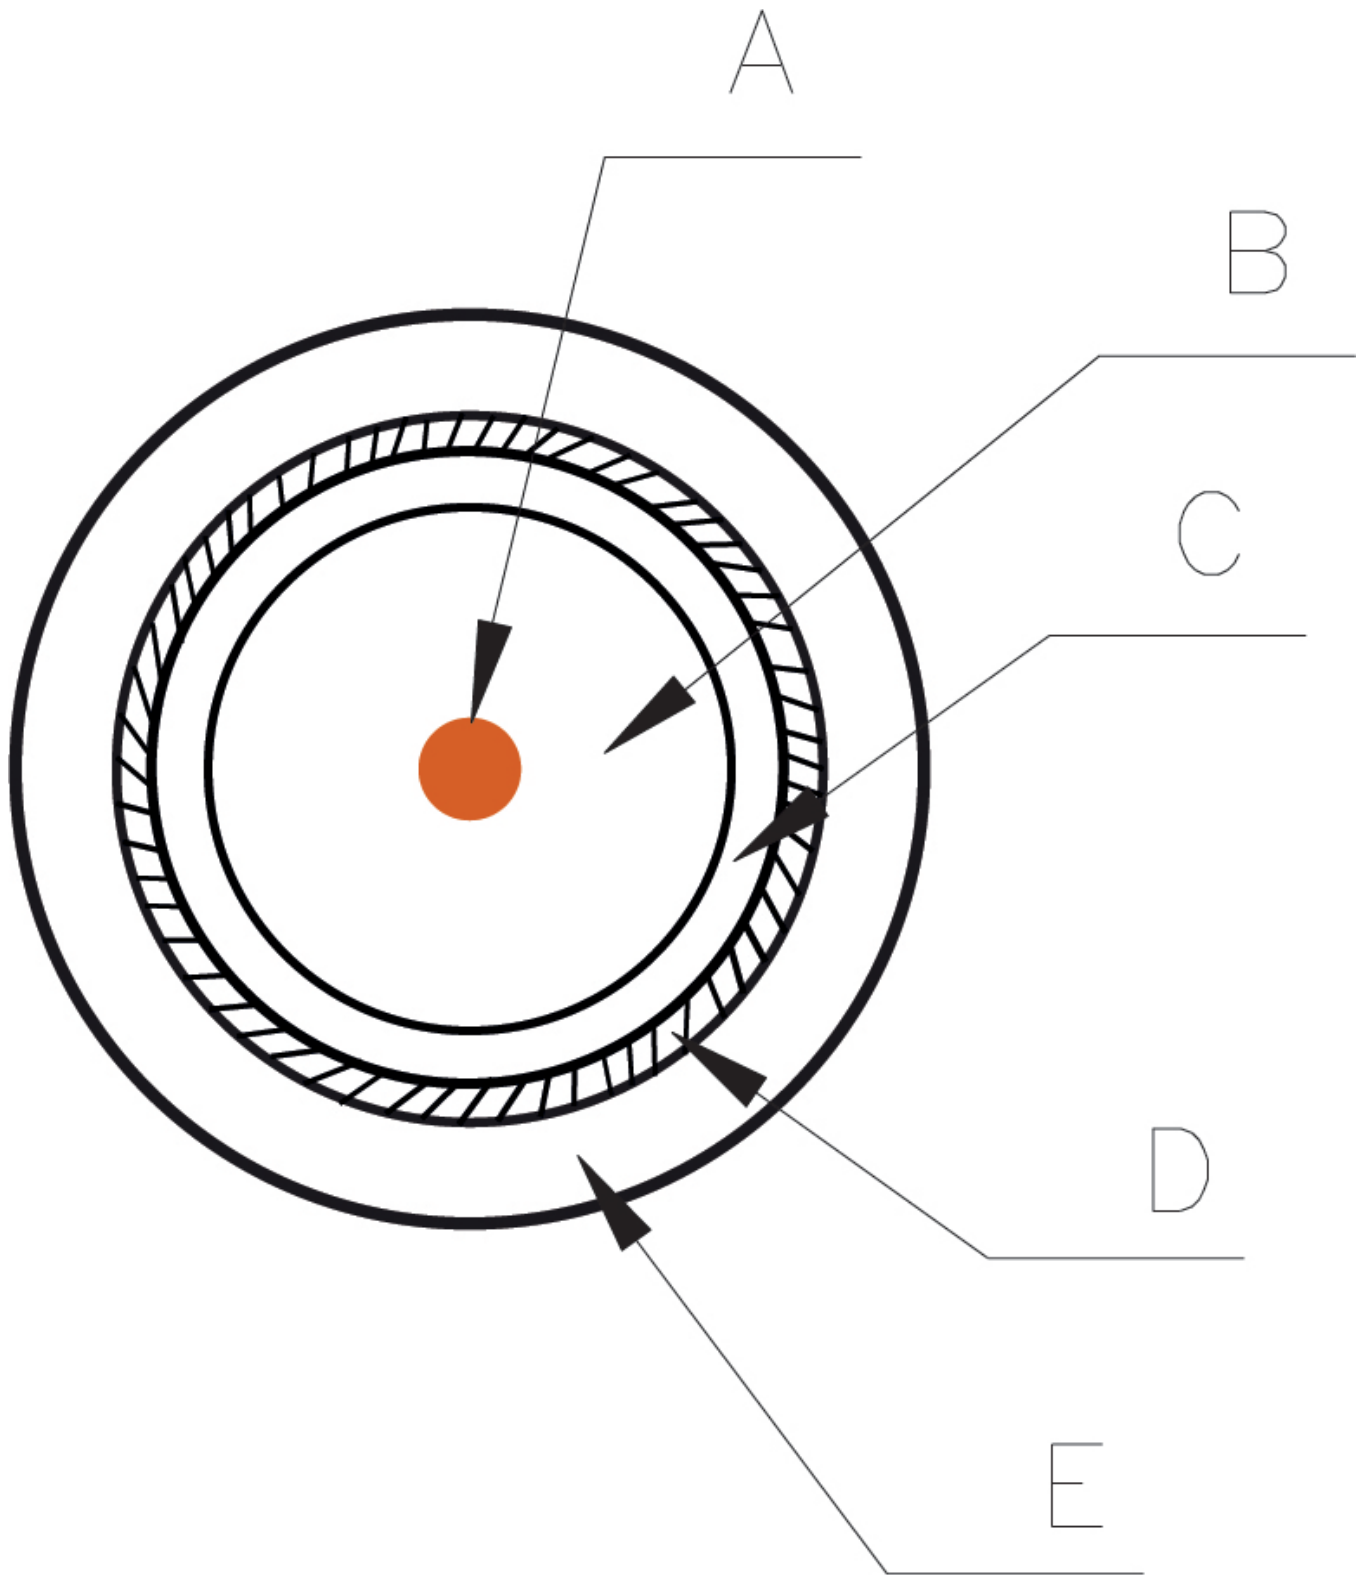

## Technical specifications : Ref. 212602

|   |        |                                   |
|---|--------|-----------------------------------|
| Model   |        | T-100                             |
| Cable type  |        | RG-6                              |
| Standard  |        | EN 50117-9-2                      |
| Euroclass   |        | Eca                               |
| Class   |        | A                                 |
| Inner conductor Diameter                          | in     | 0.044                             |
| Inner conductor Material                          |        | Copper (Cu)                       |
| Inner conductor Resistance                        | Ohm/km | < 20                              |
| Dielectric Diameter                               | in     | 0.185                             |
| Dielectric Material                               |        | Foam polyethylene (PEE)           |
| Dielectric Color                                  |        | White RAL 9003                    |
| Overlapped foil                                   |        | Aluminium + Polyester + Aluminium |
| Braid Material                                    |        | Aluminium                         |
| Braid dimensions: No. of carriers (Nc)            |        | 16                                |
| Braid Dimensions: No. of strands per carrier (Ns) |        | 8                                 |
| Braid Dimensions: strand diameter (Ø)             | in     | 0.005                             |
| Braid Resistance                                  | Ohm/km | < 27                              |
| Braid Coverage                                    | %      | 77                                |
| 2nd foil  |        | No                                |
| 2nd foil glued to the dielectric                  |        | No                                |
| Petrol-jelly                                      |        | No                                |
| Anti-migrating film                               |        | No                                |
| Outer sheath Diameter                             | in     | 0.26                              |
| Outer sheath Material                             |        | PVC                               |
| Minimum bending radius                            | in     | 1.299                             |
| Transfer impedance (5-30MHz)                      | mΩ /m  | < 5                               |
| 1GHz shielding                                    | dB     | > 85                              |
| Spark Test  | Vac    | 3000                              |
| Capacitance                                       | pF/m   | 52                                |
| Impedance   | Ω      | 75                                |
| Velocity ratio                                    | %      | 85                                |
| Operating temperature                             | °F     | -22 ... 158                       |
| Atenuacion 5MHz                                   | dB/m   | 0.02                              |
| Atenuacion 47MHz                                  | dB/m   | 0.05                              |
| Atenuacion 54MHz                                  | dB/m   | 0.05                              |
| Atenuacion 90MHz                                  | dB/m   | 0.06                              |
| Atenuacion 200MHz                                 | dB/m   | 0.08                              |
| Atenuacion 500MHz                                 | dB/m   | 0.14                              |
| Atenuacion 698MHz                                 | dB/m   | 0.15                              |
| Atenuacion 800MHz                                 | dB/m   | 0.16                              |
| Atenuacion 862MHz                                 | dB/m   | 0.17                              |
| Atenuacion 950MHz                                 | dB/m   | 0.18                              |
| Atenuacion 1000MHz                                | dB/m   | 0.19                              |
| Atenuacion 1220MHz                                | dB/m   | 0.21                              |
| Atenuacion 1350MHz                                | dB/m   | 0.23                              |
| Atenuacion 1750MHz                                | dB/m   | 0.25                              |
| Atenuacion 2050MHz                                | dB/m   | 0.28                              |
| Atenuacion 2150MHz                                | dB/m   | 0.29                              |
| Atenuacion 2200MHz                                | dB/m   | 0.29                              |
| Atenuacion 2300MHz                                | dB/m   | 0.3                               |
| Atenuacion 2400MHz                                | dB/m   | 0.31                              |
| Atenuacion 3000MHz                                | dB/m   | 0.34                              |
| Return losses 5MHz                                | dB     | 23                                |
| Return losses 47MHz                               | dB     | 23                                |
| Return losses 54MHz                               | dB     | 23                                |
| Return losses 90MHz                               | dB     | 23                                |
| Return losses 200MHz                              | dB     | 23                                |
| Return losses 500MHz                              | dB     | 20                                |
| Return losses 698MHz                              | dB     | 20                                |
| Return losses 800MHz                              | dB     | 20                                |
| Return losses 862MHz                              | dB     | 20                                |
| Return losses 950MHz                              | dB     | 20                                |
| Return losses 1000MHz                             | dB     | 20                                |
| Return losses 1220MHz                             | dB     | 18                                |
| Return losses 1350MHz                             | dB     | 18                                |
| Return losses 1750MHz                             | dB     | 18                                |
| Return losses 2050MHz                             | dB     | 16                                |
| Return losses 2150MHz                             | dB     | 16                                |
| Return losses 2200MHz                             | dB     | 16                                |
| Return losses 2300MHz                             | dB     | 16                                |
| Return losses 2400MHz                             | dB     | 16                                |
| Return losses 3000MHz                             | dB     | 16                                |