



## CXT 18C coaxial cable Dca Euroclass

---

<b>Ref.</b>	213910
<b>EAN13</b>	8424450212417

---

### Other features

---

<b>Colour</b>	Black
<b>Dispenser</b>	Without dispenser
<b>Length</b>	100.00 m

---

### Packing

---

<b>Reel</b>	100 m
<b>Box</b>	500 m
<b>Pallet</b>	6000 m

---

### Physical data

---

<b>Net weight</b>	40.00 g
<b>Gross weight</b>	43.00 g
<b>Width</b>	1,000.00 mm
<b>Height</b>	7.00 mm
<b>Depth</b>	7.00 mm

---

### Discover

---

#### Double-shielded Class B coaxial cable

They provide two shielding layers and belong in EN 50117 standard Class B, according to their

structural properties:

- For 5 MHz - 30 MHz => TI < 15 mΩ/m
- For 30 MHz - 1000 MHz => SA > 75 dB
- For 1000 MHz - 2000 MHz => SA > 65 dB
- For 2000 MHz - 3000 MHz => SA > 55 dB

Where the transfer impedance (TI) defines how effective the shielding is at low frequencies, while the shielding attenuation (SA) defines it in the 30 MHz-to-3000 MHz range.

## Mounting details

---

### DETAIL VIEW OF THE COAXIAL CABLE SECTION

**A**-Inner conductor


**B**-Dielectric

**C**-Foil

**D**-Braid

**E**- Anti-migrating film

**F**-Outer sheath

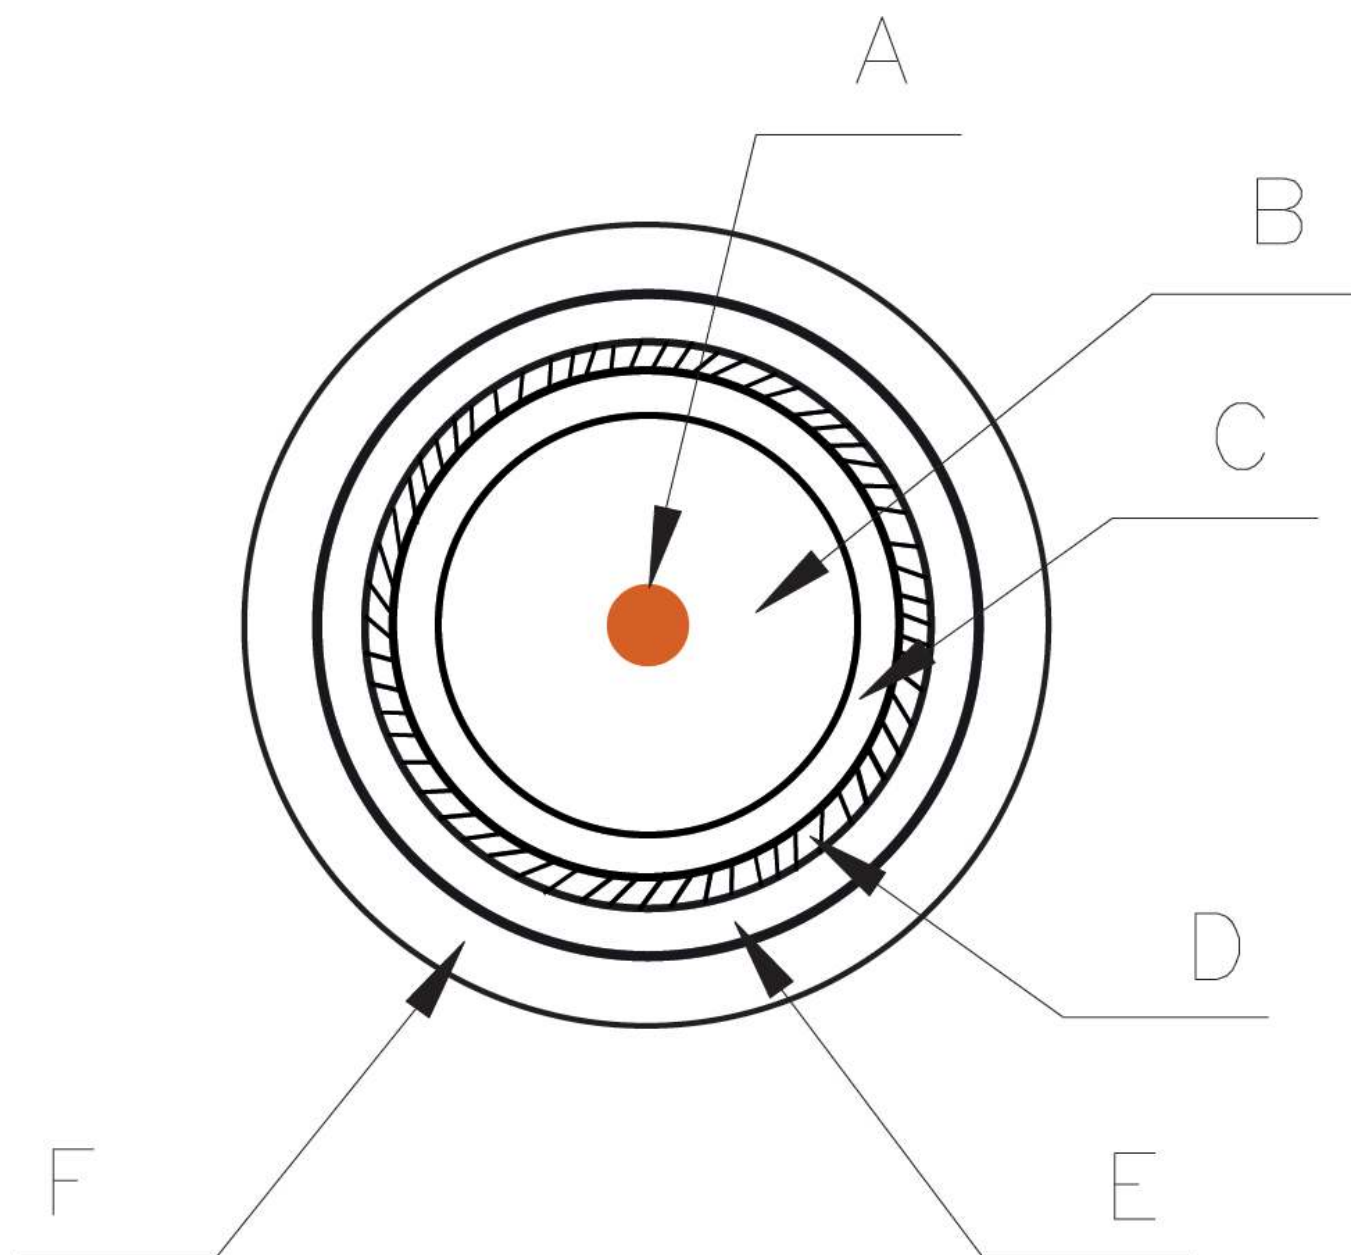

## CABLE UNWINDING PROCESS

1. Place the cable with the label side down
2. Cut out the plastic in the central hole only\*
3. Cut out the zip ties
4. Pull the cable by the end placed in the center hole
5. Stack with the label side down to protect the cable

*\*(Keep the surrounding plastic intact to avoid the cable unroll)*



