


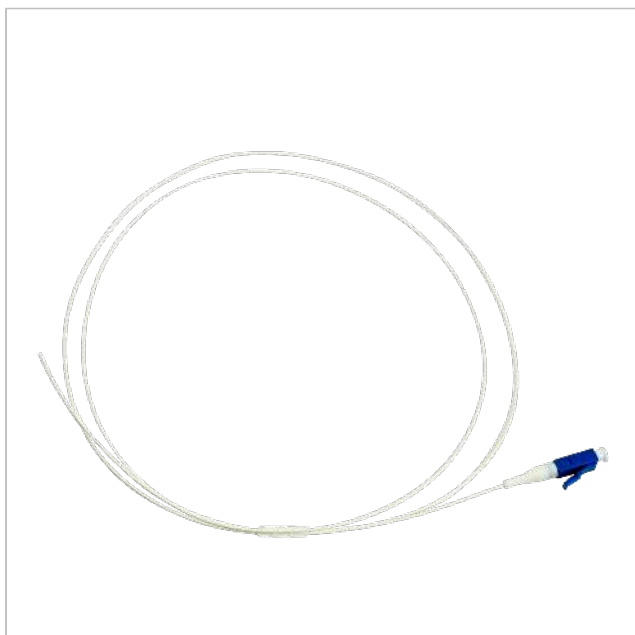

Pigtail LC/UPC, Single-mode (SM), LSFH indoor

Single-mode (SM) pigtail, used for interconnecting optical equipment, have its end pre-terminated with LC/UPC connector.

The 900µm cover is of LSFH type and is recommended for indoor use. Additionally, its pre-terminated end has a short boot, facilitating installation in wall sockets, avoiding increases in attenuation due to undesirable bends, allowing the sliding of the pigtail through conduits, reducing the space required for connection, and being less demanding regarding bend radius.

Ref.	230609
Logical ref.	OLCUPC1
EAN13	8424450279441

Other features

Colour	White
Supply method	Single packing
Length	1.00 m

Packaging info

Bag	1 pcs.
------------	--------

Physical data

Net weight	2.00 g
Gross volume	0.40 dm ³
Gross weight	7.00 g
Width	1.00 mm
Height	1,000.00 mm
Depth	1.00 mm
Main product weight	2.00 g

Highlights

- ITU-T G.657.A2 fiber type
- LSFH sheath, white colour
- LC/UPC connectors
- 1m long

Technical specifications : Ref. 230609

Fiber core type		Single-mode (ITU-T-G.657.A2)
Optical fiber type category		OS2
Fiber core diameter	µm	9
Fiber cladding diameter	µm	125
Coating buffer diameter	µm	250
Cable structure		Tight buffer
Outer sheath Diameter	in	0.035
Outer sheath Material		LSFH
Optical fiber attenuation: 1310nm Max	dB/km	0.4
Optical fiber attenuation: 1550nm Max	dB/km	0.3
Cable length	m	1
Insertion losses Max	dB	0.5
Return losses Min	dB	50
Optical connector type		LC
Polishing type (Optical connector)		UPC
Operating temperature	°F	-4 ... 158