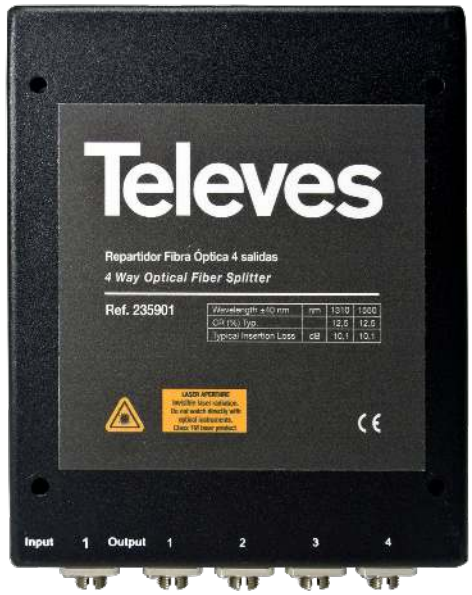


FC/UPC 4W optical splitter 1260...1650 nm 7 dB

4-way splitter with FC/UPC connectors for optical signals in the 1260 nm-to-1650 nm range.
Recommended for wideband LNB based applications, or any type of GPON network. The compact frame is perfect for individual installations.

Ref.	235901
Logical ref.	OVT4N
EAN13	8424450152454

Packaging info	
Box	1 pcs.
Bucket	50 pcs.

Physical data	
Net weight	239.00 g
Gross volume	1.02 dm³
Gross weight	239.00 g
Width	115.00 mm
Height	151.00 mm
Depth	20.00 mm
Main product weight	239.00 g

Highlights

- High reliability
- High uniformity among outputs
- Low insertion losses
- Made in single-mode fiber (SM)
- FC/UPC connectors

Technical specifications : Ref. 235901

Number of outputs		4
Optical connectors Input		FC/UPC
Optical connectors Output		FC/UPC
Fiber type		Single-Mode
Coupling ratio (per output)		Symmetrical
Wavelength	nm	1310 ... 1550
Insertion losses	dB	< 7.6
Return losses	dB	> 50
Uniformity	dB	< 0.6
Polarization loss (PDL)	dB	< 0.2
Directivity	dB	> 50
Operating temperature	°F	-40 ... 185