

# Lower section pivoting, Hot-Dip Galvanizing + Painting 550 tower

3 m lower section pivoting for the erection of a guyed 550-series tower.
The section is painted red (RAL 3020).
Guy wires are required for pivoting sections.

| | |
|---|---|
| Ref. | 313902 |
| Logical ref. | TFUSS550FV |
| EAN13 | 8424450177723 |

| Other features | |
|---|---|
| Colour | Red |
| Finishing | Hot-Dip Galvanizing + Red painted |

| Packaging info | |
|---|---|
| Unit | 1 pcs. |


| Physical data | |
|---|---|
| Photo with dimensions | 3.00 |
| Net weight | 97,000.00 g |
| Gross volume | 480.00 $dm^3$ |
| Gross weight | 97,000.00 g |
| Width | 620.00 mm |
| Height | 3,200.00 mm |
| Depth | 536.00 mm |
| Main product weight | 95,786.00 g |

## Highlights

- Anchoring system with union nuts
- 550 tower maximum height: 140m (as per calculation conditions)
- The hot galvanizing surface treatment provides enhanced durability in adverse corrosion conditions
- Colour paint, oven-lacquering with polyester electrostatic powder

## Mounting details

It consists in fixing the lower section to the base, set it in upright position and levelling it. The subsequent Middle Sections are then mounted, equipped with the appropriate guy wires; the mounting is carried out by climbing on the previously mounted sections and hoisting the new section with the help of the appropriate lifting tools.

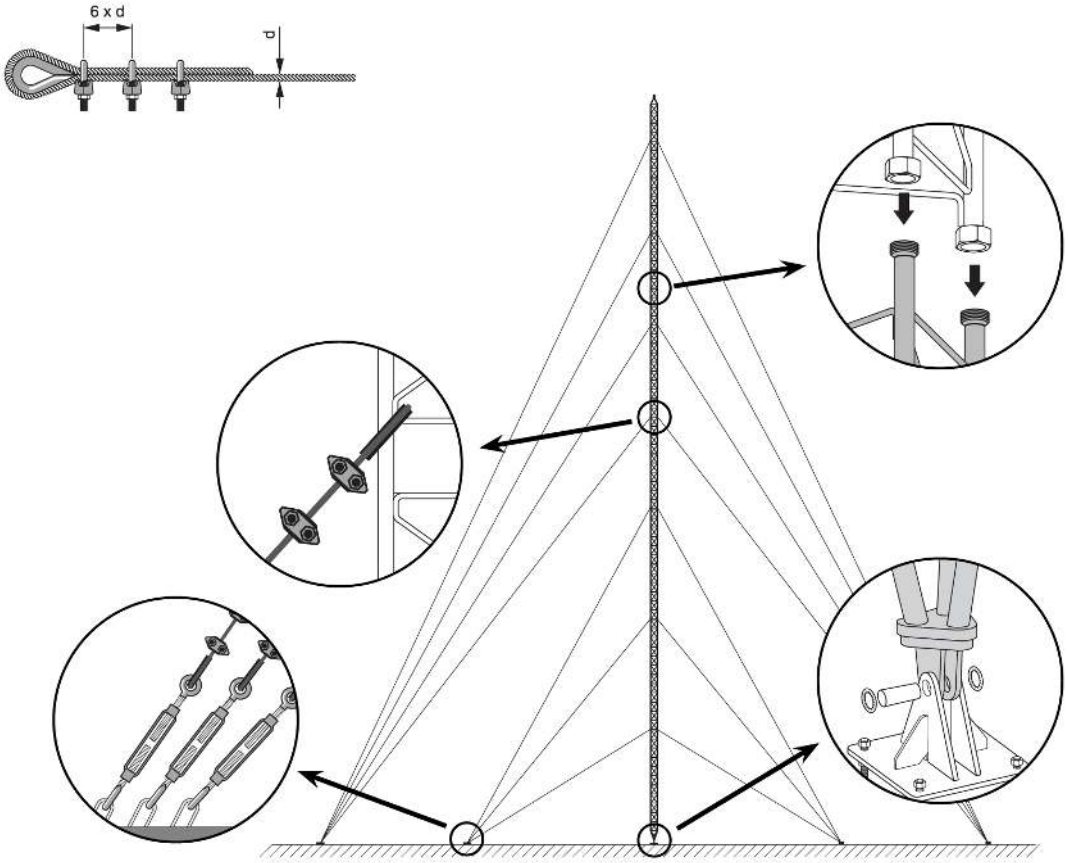

Televes®

# **Technical specifications** : Ref. 313902

| | | |
|---|---|---|
| **Surface facing the wind** | $m^2$ | 0.845 |