

Transition section, Hot-Dip Galvanizing + Painting 450 to 550 tower

3 m Transition section to adapt 450 and 550 range tower sections in order to build combined towers.
The section is painted red (RAL 3020).

Ref.	314101
Logical ref.	TV4550FV
EAN13	8424450177693

Other features	
Colour	Red
Finishing	Hot-Dip Galvanizing + Red painted

Packaging info	
Unit	1 pcs.


Physical data	
Photo with dimensions	3.00
Net weight	91,000.00 g
Gross volume	500.00 dm^3
Gross weight	91,000.00 g
Width	620.00 mm
Height	3,050.00 mm
Depth	536.00 mm
Main product weight	78,107.00 g

Highlights

- Anchoring system with union nuts
- 550 tower maximum height: 140m (as per calculation conditions)
- The hot galvanizing surface treatment provides enhanced durability in adverse corrosion conditions
- Colour paint, oven-lacquering with polyester electrostatic powder

Mounting details

It consists in fixing the lower section to the base, set it in upright position and levelling it. The subsequent Middle Sections are then mounted, equipped with the appropriate guy wires; the mounting is carried out by climbing on the previously mounted sections and hoisting the new section with the help of the appropriate lifting tools.

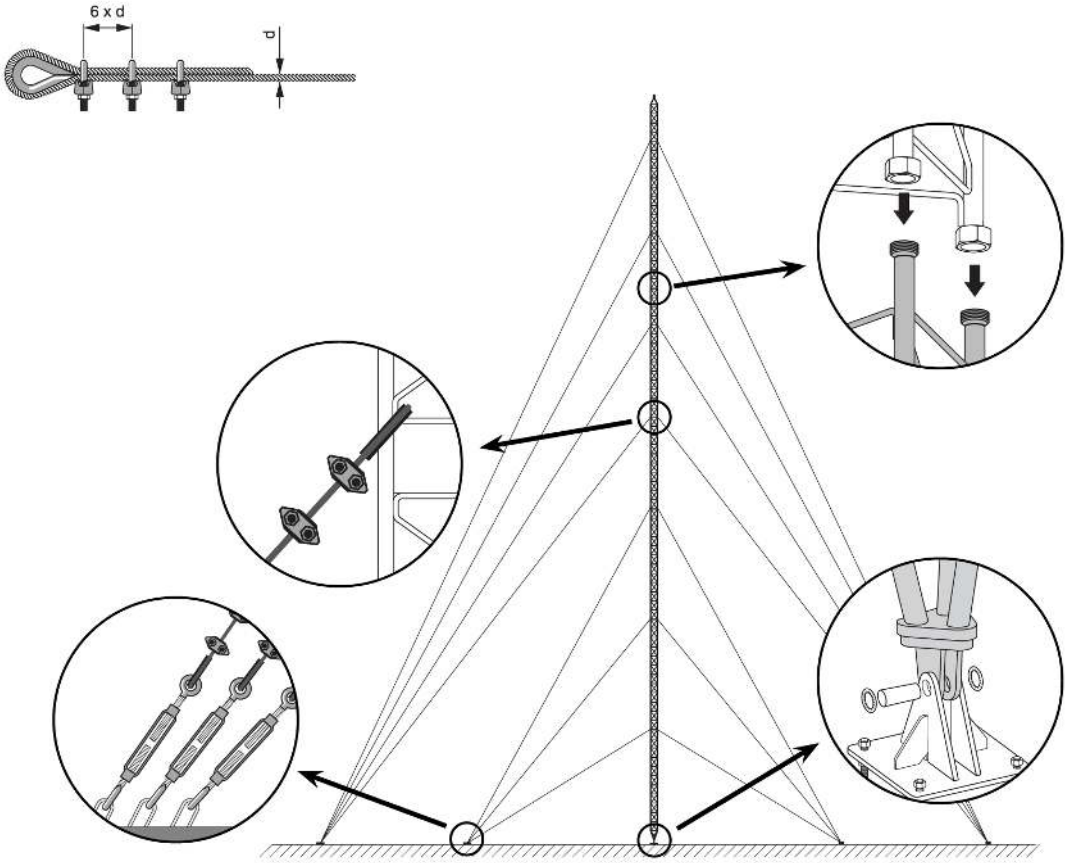

Televes®

Technical specifications : Ref. 314101

Surface facing the wind	m^2	0.848