



## Terminal Enclosure Coaxial, data, telephone and optical fiber cable

Designed to house the equipment separating the user's network from the community's. Designed to be placed in the NTE, it works as a enclosure that houses the different technologies; can be manipulated by the user.

---

<b>Ref.</b>	546702
<b>EAN13</b>	8424450214435

---

### Packaging info

---

<b>Box</b>	1 pcs.
------------	--------

---

### Physical data

---

<b>Net weight</b>	8,025.00 g
<b>Gross volume</b>	32.67 dm <sup>3</sup>
<b>Gross weight</b>	8,025.00 g
<b>Width</b>	640.00 mm
<b>Height</b>	530.00 mm
<b>Depth</b>	80.00 mm

---

### Highlights

---




- Robust: made of steel.
- Pre-marked inputs for an easy opening: 16 inputs for 32mm-tube and 16 inputs for 20mm-tube
- Perforated door for better ventilation with an ABS locking tab (can be manually operated by the user)
- MDF board for product bolting (dimensions: 520x420x12mm)

- Chassis dimensions: 600 x 500 x 80mm
- Frame + door dimensions: 640 x 530 x 80mm
- Equipped with a lock to avoid external manipulation
- Interchangeable door (left or right hinge)
- Chassis with lateral tabs that allow its fixing on the wall while the mortar is being applied
- Includes a ground connection between the door and the chassis
- Lacquered white (RAL 9016)

## Mounting details

---

1. Pre-cut panels are supplied in place. They can be removed by tapping them from the outside
  2. Embedded wall mounting
  3. Surface mounting
- \* Anchor points. Screws not included

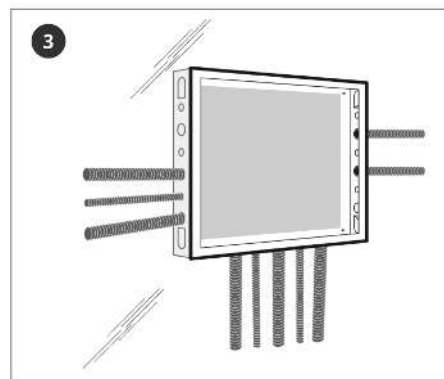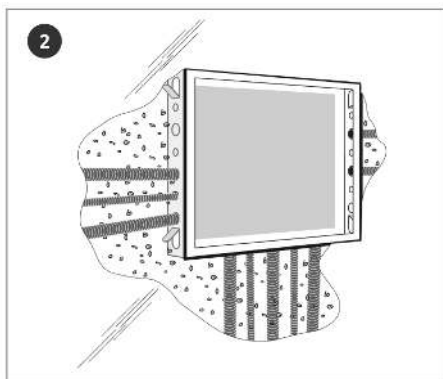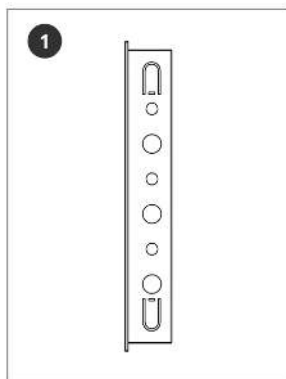

## Technical specifications : Ref. 546702

Front door locking system		One-point lock
Installation type		Wall built-in
Grounding		Yes
Type of ventilation		No ventilation
Material		Steel
Thickness	in	0.059
Color		White
Height	in	25.197
Width	in	20.866
Depth	in	3.169