



## Splitting Terminal Enclosure Coaxial, data, telephone and optical fiber cable

Designed mainly for use in in-building telecommunications networks. Its usual point of installation is at the dividing walls of each floor, although it can also be used as a pass register in any type of installation. It will usually house the different technologies associated with telecommunications (from equipment to cabling), thus allowing it to be a measurement and testing point for the network.

---

<b>Ref.</b>	546801
<b>Logical ref.</b>	GH45
<b>EAN13</b>	8424450271643

---

### Packaging info

---

<b>Box</b>	1 pcs.
------------	--------

---

### Physical data

---

<b>Net weight</b>	5,942.00 g
<b>Gross volume</b>	37.31 dm <sup>3</sup>
<b>Gross weight</b>	6,456.00 g
<b>Width</b>	450.00 mm
<b>Height</b>	450.00 mm
<b>Depth</b>	154.00 mm

---

### Highlights

---

- Robust: made of steel

- Security: triangular standard lock with key included
- Different mounting options: wall or ceiling mounting. It can be mounted with mortar, being held in place by the pipes that access it
- Pre-cut inputs for an easy opening: 24 inputs for 51mm-tube and 48 inputs for 26mm-tube equally distributed over the 4 sides for greater versatility
- With access from all 4 sides
- MDF board to facilitate the bolting of the elements (dimensions: 370x370x10mm)
- Dimensions: 450x450x154mm
- Hinged door with exchangeable opening (right or left), which can also be removed to facilitate operations within it
- Includes a ground connection and 2 M4 hexagonal nuts
- Compatibility with our Splitting Terminal Enclosures, which would be installed inside this product
- Compatibility with our Terminal Enclosures
- Lacquered white (RAL 9016)


## Mounting details

**1.** Pre-cut panels are supplied in place. They can be removed by tapping them from the outside

**2a.** Embedded wall mounting

**2b.** Surface mounting

\* Anchor points. Screws not included

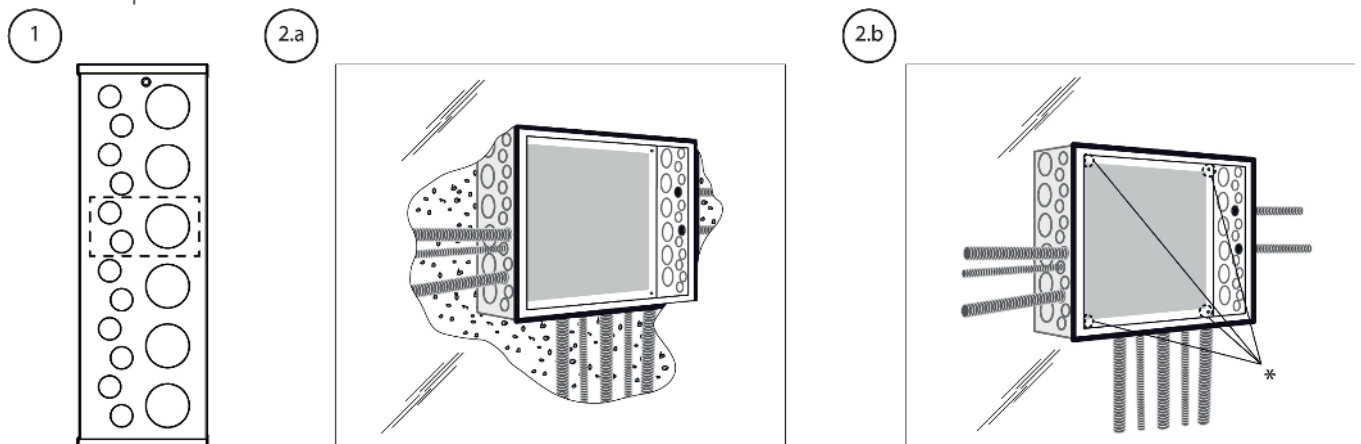

## Technical specifications : Ref. 546801

Front door locking system		Key Lock, one-point lock
Installation type		Wall built-in / Wall / Ceiling
Protection index (IP)		30
Protection index (IK)		07
Grounding		Yes
Type of ventilation		No ventilation
Material		Steel
Thickness	in	0.039
Color		White
Height	in	17.717
Width	in	17.717
Depth	in	6.063