



## EuroSwitch 9 inputs - 8 outputs

Compact and effective for large installations

Compact multiswitch equipped with 9 inputs (one terrestrial and 8 for two satellites, each with its four polarities) and 8 user outputs.

Thanks to its great compactness and its optimized electronic design, it presents very low through and tap losses. This allows to reduce the number of amplifiers needed in the cascade and to obtain a better balanced signal in the users, even in large collective installations.

Can be used as a terminal (star topology) or as a cascade by using a simple switch. In addition, it incorporates a second switch that activates the TForce technology, which automatically adjusts the terrestrial signal and keep it constant despite variations in the reception.

RED compliant

|              |               |
|--------------|---------------|
| Ref.         | 719601        |
| Logical ref. | MSE98C        |
| EAN13        | 8424450223895 |

### Packaging info

|     |        |
|-----|--------|
| Box | 1 pcs. |
|-----|--------|

### Physical data

|            |          |
|------------|----------|
| Net weight | 560.00 g |
|------------|----------|

|                            |                      |
|----------------------------|----------------------|
| <b>Gross volume</b>        | 1.60 dm <sup>3</sup> |
| <b>Gross weight</b>        | 700.00 g             |
| <b>Width</b>               | 205.00 mm            |
| <b>Height</b>              | 120.00 mm            |
| <b>Depth</b>               | 30.00 mm             |
| <b>Main product weight</b> | 560.00 g             |

## Highlights

---

- Very compact in dimensions and weight, even in models with high number of users
- Very low through and tap losses
- High shielding (A class) thanks to its manufacture in Zamak
- Versatile: selector switch to shift between cascade and terminal modes
- Great isolation between inputs and outputs
- Equipped with the TForce technology, the terrestrial output level is automatically adjusted (TERR. AMP. ACTIVE) to the optimal level
- 10 dB Low Gain (LG) / High Gain (HG) switch for the attenuation of the satellite input signal for each 8-user group
- Two powering options: From the power supply, or from the cascade through the satellite inputs or outputs
- Low consumption under normal conditions. In addition, ECO mode reduces consumption as the number of connected users decreases
- Wide 12-18V power supply range, making it compatible with most existing systems
- Current circulation between all inputs and cascades
- Input and output colour identification
- 100% european design, quality, and manufacturing


## Application example

---

## Installation into a medium-size hotel (2 satellites)


The LNBS, terrestrial antenna and the whole cascade is powered by a single 3A PSU.

In case of using an amplifier, this will be the recommended element to place the power supply unit.

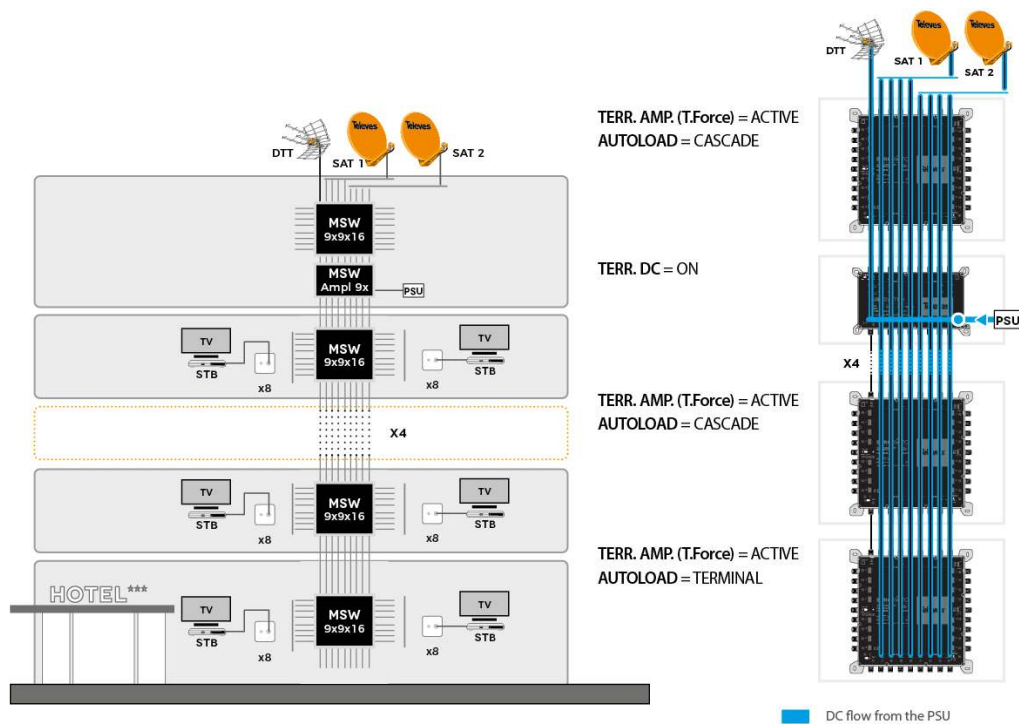

## Mounting details

Optimize installation and organize cabling cleanly thanks to the included spacers. Their installation adds a 15 mm clearance from the wall to easily route cables behind the device.

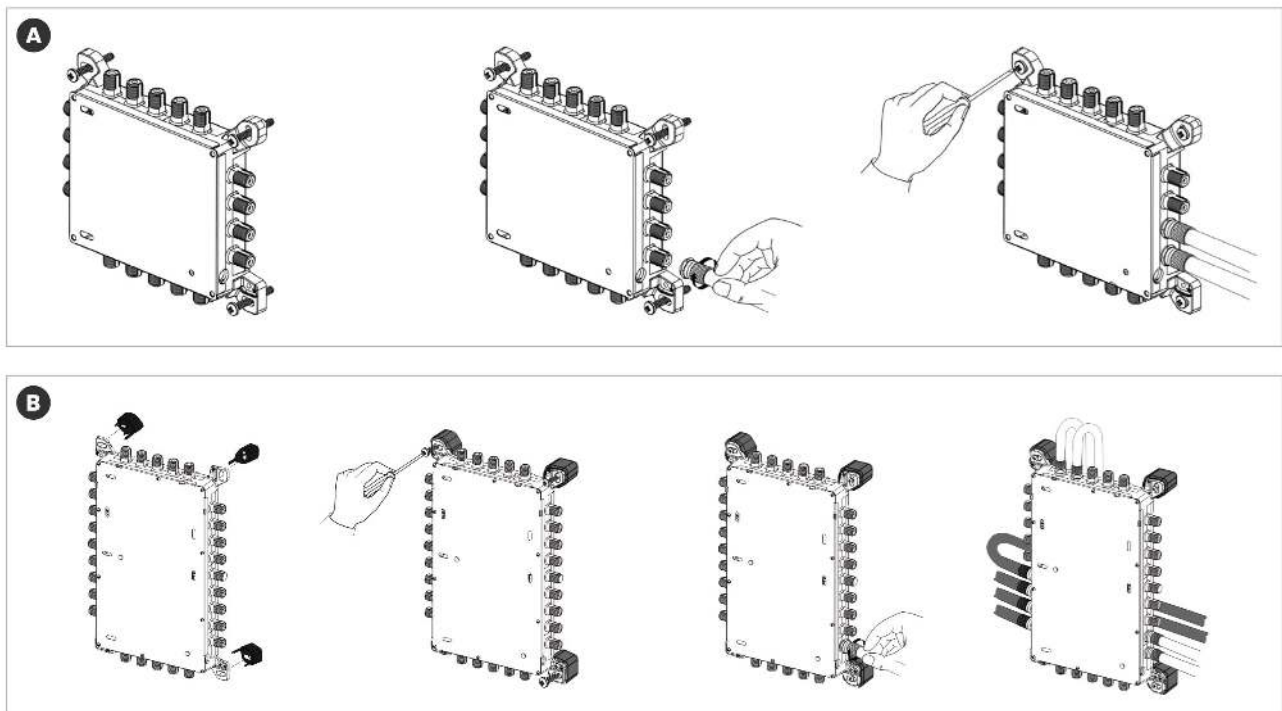

## Technical specifications : Ref. 719601

|                                                    |      |              |
|----------------------------------------------------|------|--------------|
| Number of inputs                                   |      | 9            |
| Number of cascable outputs                         |      | 9            |
| Number of user outputs                             |      | 8            |
| Frequency range TERR.                              | MHz  | 88 ... 862   |
| Frequency range SAT.                               | MHz  | 950 ... 2400 |
| Input level TERR.                                  | dBmV | 20 ... 50    |
| Input level SAT.                                   | dBmV | 5 ... 52     |
| Through losses TERR.                               | dB   | < 2          |
| Through losses SAT.                                | dB   | < 2          |
| Tap losses TERR. Active                            | dB   | 0            |
| Tap losses TERR. Passive                           | dB   | 30           |
| Tap losses SAT. HG                                 | dB   | 0            |
| Tap losses SAT. LG                                 | dB   | 14 ... 8     |
| Output level 10Ch DVB-T                            | dBmV | 18           |
| Isolation H/V                                      | dB   | > 50         |
| Isolation users                                    | dB   | > 30         |
| Powering                                           | Vdc  | 12 ... 18    |
| Max. current (PSU - TERR ACT.)                     | mA   | 65           |
| Max. current with loaded outputs (PSU - TERR ACT.) | mA   | 110          |
| Max. current (PSU - TERR PAS.)                     | mA   | 5            |
| Max. current (STB)                                 | mA   | 85           |
| Operating temperature                              | °F   | 23 ... 113   |
| Protection index (IP)                              |      | 20           |