

Single LNB för offsetparabol (universaltyp) 1 utgång: HH/HL/VH/VL

Standard universal-LNB med singel utgång för alla fyra kombinationer av band/polarisation (HH, HL, VH, VL).

Ref.	746902
	SP4EN
EAN13	8424450137017

Andra funktioner	
Färg	Grå

Förpackning	
Låda	1 st.
Ask	100 st.
Lastpall	900 st.


Fysisk data	
Nettovikt	138,00 g
Bruttovolym	0,57 dm³
Bruttovikt	138,00 g
Bredd	118,00 mm
Höjd	60,00 mm
Djup	60,00 mm
Huvudproduktens vikt	129,00 g

Utmärkande egenskaper

- Diskret utförande med litet LNB-hus
- Hög förstärkning
- Lågt brustal
- Utmärkt linaritet och frekvensgång
- Hög krosspolarisation
- Mycket högt fuktskydd klassad med IP66
- För ett mycket brett temperaturspektrum
- Lättvikts-typ

- Kompatibel med 40-mm fäste
- Låg energiförbrukning
- Spänningsmatas via mottagare eller multiswitch
- Enkel att ansluta
- Multisatellit kompatibel

Applikationsexempel

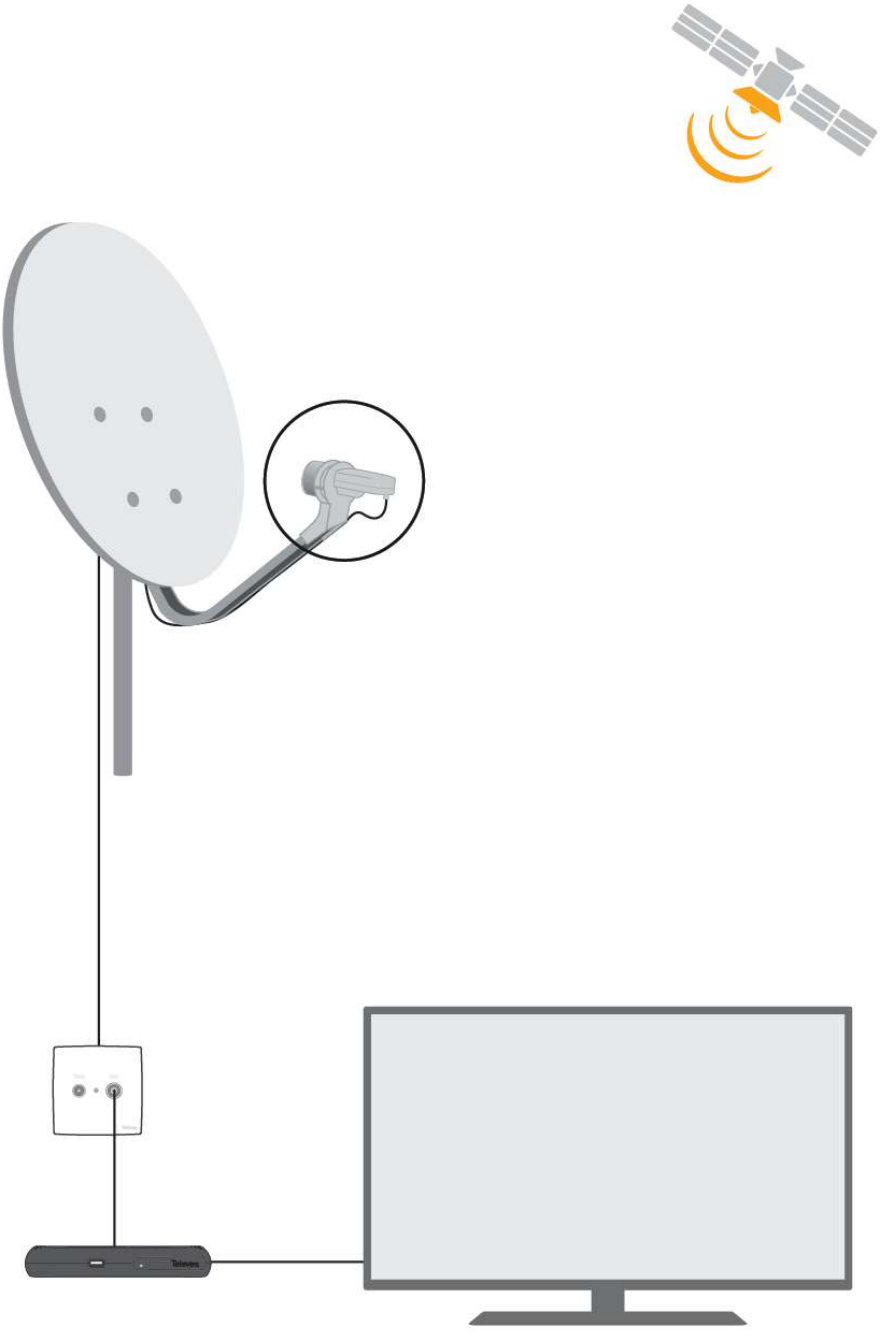

Tekniska specifikationer : Ref. 746902

Frequency range	GHz	10,7 ... 12,75
Control signals Horizontal	Vdc	16 ... 20
Control signals Vertical	Vdc	12 ... 14
Output frequency range	MHz	950 ... 2150
L.O. frequency 0KHz	GHz	9,75
L.O. frequency 22KHz	GHz	10,6
Gain	dB	60
Noise figure	dB	0,3
L.O. stability	MHz	-1,5 ... 1,5
Polarities discrimination	dB	> 20
Phase noise (@10 KHz)	dBc	-75
Powering	Vdc	10 ... 20
Max. current	mA	110
Impedance	Ω	75
Connectors		"F" female
LNB-bracket diameter	mm	40
Operating temperature	°C	-30 ... 60