

Twin LNB offset 2 utgångar: HH/HL/VH/VL

Twin LNB med två identiska universalutgångar, var och en med fyra polaritet/band kombinationer (HH, HL, VH, VL).

Ref.	747002
	SP42EN
EAN13	8424450137048

Andra funktioner	
Färg	Grå

Förpackning	
Låda	1 st.
Ask	50 st.
Lastpall	600 st.


Fysisk data	
Nettovikt	287,00 g
Bruttovolym	1,36 dm³
Bruttovikt	287,00 g
Bredd	148,00 mm
Höjd	113,00 mm
Djup	63,00 mm
Huvudproduktens vikt	279,00 g

Utmärkande egenskaper

- Diskret utförande med litet LNB-hus
- Hög förstärkning
- Lågt brustal
- Utmärkt linaritet och frekvensgång
- Hög krosspolarisation
- Mycket högt fuktskydd klassad med IP66
- För ett mycket brett temperaturspektrum
- Lättvikts-typ

- Kompatibel med 40-mm fäste
- Låg energiförbrukning
- Spänningsmatas via mottagare eller multiswitch
- Enkel att ansluta
- Multisatellit kompatibel

Applikationsexempel

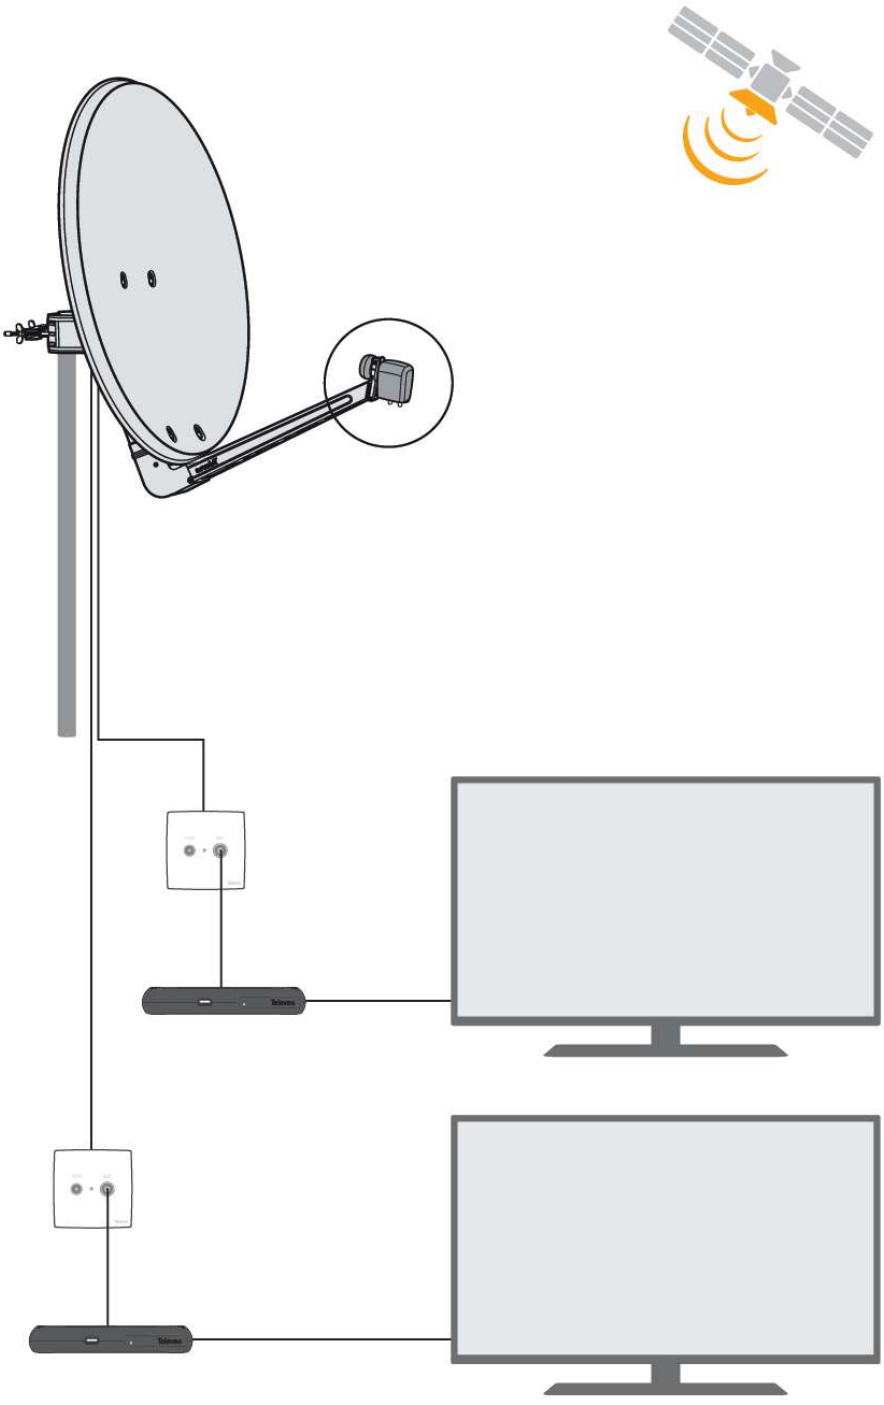

Tekniska specifikationer : Ref. 747002

Frequency range	GHz	10,7 ... 12,75
Control signals Horizontal	Vdc	15 ... 20
Control signals Vertical	Vdc	12 ... 14
Output frequency range	MHz	950 ... 2150
L.O. frequency 0KHz	GHz	9,75
L.O. frequency 22KHz	GHz	10,6
Gain	dB	60
Noise figure	dB	0,3
L.O. stability	MHz	-1,5 ... 1,5
Polarities discrimination	dB	> 20
Phase noise (@10 KHz)	dBc	-75
Powering	Vdc	12 ... 20
Max. current	mA	120
Impedance	Ω	75
Connectors		"F" female
LNB-bracket diameter	mm	40
Operating temperature	°C	-30 ... 60