

Quattro LNB offset 4 utgångar: HH-HL-VH-VL

Quatro LNB med fyra utgångar, var och en med specific kombination av polaritet/band (HH, HL, VH, VL). Varje utgång är markerad med respektive färg.

Ref.	747102
	SP44EN
EAN13	8424450137079

Andra funktioner	
Färg	Grå

Förpackning	
Låda	1 st.
Ask	50 st.
Lastpall	600 st.

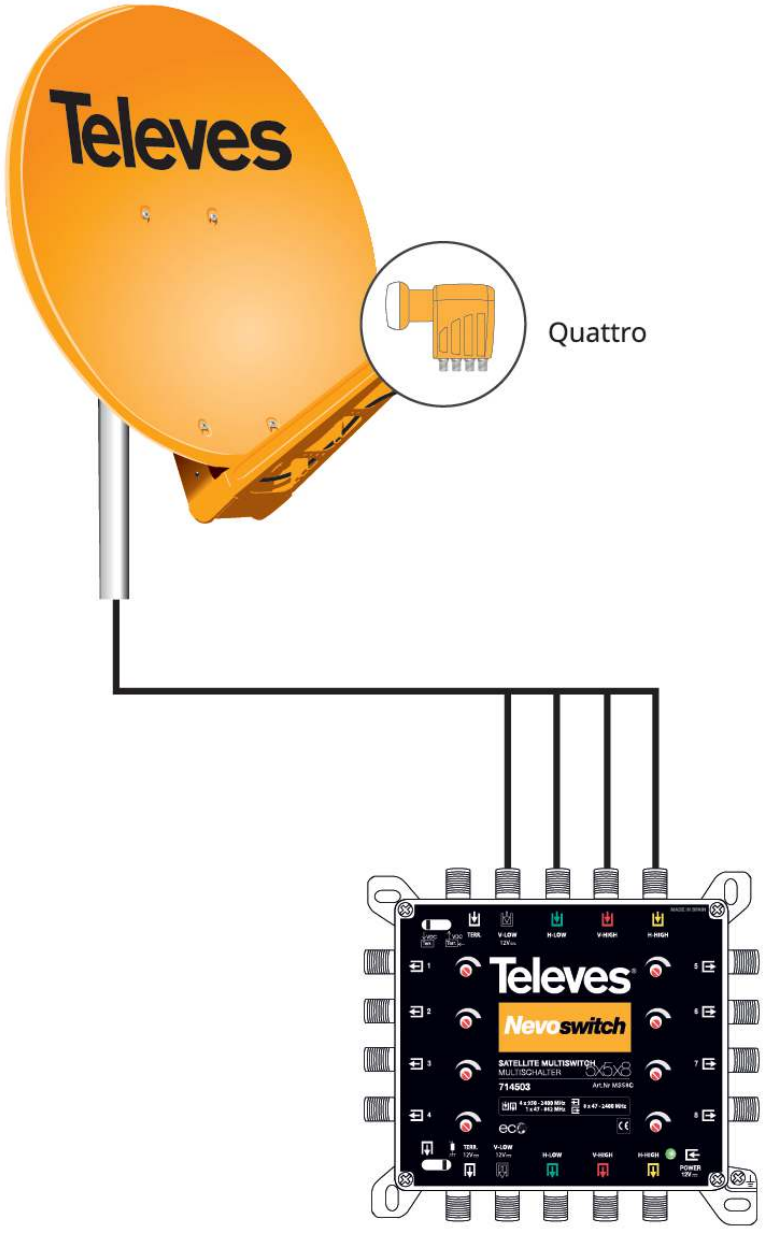
Fysisk data	
Nettovikt	325,00 g
Bruttovolym	1,29 dm³
Bruttovikt	325,00 g
Bredd	148,00 mm
Höjd	113,00 mm
Djup	65,00 mm
Huvudproduktens vikt	317,00 g

Utmärkande egenskaper

- Diskret utförande med litet LNB-hus
- Hög förstärkning
- Lågt brustal
- Utmärkt linaritet och frekvensgång
- Hög krosspolarisation
- Mycket högt fuktskydd klassad med IP66
- För ett mycket brett temperaturspektrum
- Lättvikts-typ

- Kompatibel med 40-mm fäste
- Låg energiförbrukning
- Spänningsmatas via mottagare eller multiswitch
- Enkel att ansluta
- Multisatellit kompatibel

Applikationsexempel


Televes
Quattro
Televes
Nevoswitch
SATELLITE MULTISWITCH
MULTISCHALTER
5x8
714503

Tekniska specifikationer : Ref. 747102

Frequency range	GHz	10,7 ... 12,75
Control signals Horizontal	Vdc	16 ... 19
Control signals Vertical	Vdc	12 ... 14
Output frequency range	MHz	950 ... 2150
L.O. frequency 0KHz	GHz	9,75
L.O. frequency 22KHz	GHz	10,6
Gain	dB	60
Noise figure	dB	0,3
L.O. stability	MHz	-1,5 ... 1,5
Polarities discrimination	dB	> 20
Phase noise (@10 KHz)	dBc	-75
Powering	Vdc	12 ... 20
Max. current	mA	245
Impedance	Ω	75
Connectors		"F" female
LNB-bracket diameter	mm	40
Operating temperature	°C	-30 ... 60