


## Derivadores 2D F / Derivadores 2D F / Dérivateurs 2D F / 2W Taps F / 2-fach Abzweiger F-Anschlüsse einseitig / مخرجين F محول


Ref. 5130, 5131, 5132, 5133, 5134

Art. Nr. AZS212FN, AZS215FN, AZS219FN, AZS223FN, AZS227FN


5130  
AZS212FN

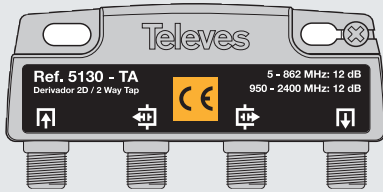


5131  
AZS215FN

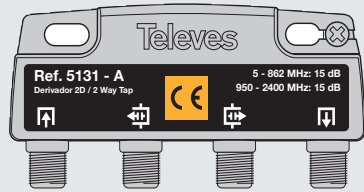


5132  
AZS219FN

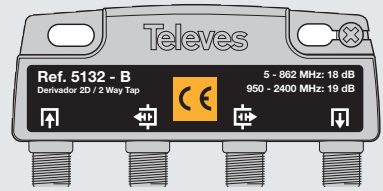

5133  
AZS223FN

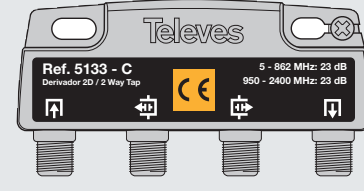

5134  
AZS227FN

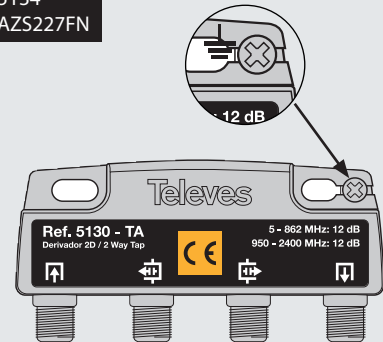

GAMA DE PRODUCTOS / GAMA DE PRODUCTOS /  
GAMME DE PRODUITS / PRODUCT RANGE /  
PRODUKTPALETTE / مجموعة من المنتجات

Ref	Art. Nr.	Descripción Description وصف	Tipo Type نوع
5130	AZS212FN	2W Taps F	TA
5131	AZS215FN	2W Taps F (15 dB)	A
5132	AZS219FN	2W Taps F (18/19 dB)	B
5133	AZS223FN	2W Taps F (23dB)	C
5134	AZS227FN	2W Taps F (27dB)	D

خصائص تقنية	Especif. técnicas	Especif. técnicas	Caract. techniq.	Tech. specif.	Tech. Daten		5130 AZS-212FN	5131 AZS-215FN	5132 AZS-219FN
نطاق الترددات	Margen freq.	Margem freq.	Marge fréq.	Freq. range	Frequenzbereich	MHz	5 - 2400		
نوع	Tipo	Tipo	Type	Type	Typ		TA	A	B
خسائر الاشتقاق	Pérdidas derivación	Perdas derivação	Pertes dérivation	Tap loss	Abzweig-dämpfung	MATV	12	15	18
						IF	12	15	19
خسائر المرور	Pérdidas paso	Perdas paso	Pertes passage	Loss IN-OUT	Durchgangsdämpfung	MATV	2,5	1,2	1,5
						IF	2,6	2	1,5
فصل	Desacoplo	Desacopl.	Découplage	Out-Tap isolation loss	Entkopplung Abzweig-ausgänge-Ausgang	MATV	> 32	> 27	> 35
						IF	> 25	> 24	> 30
الرفض بين الاشتقاقات	Rech. entre derivac.	Rejeiç. entre derivaç.	Réjéct entre dérivation	Rejection between taps	Entkopplung Abzweig-ausgänge	MATV/ FI	> 30		
تيار الذروة	Corriente máx.	Corrente max.	Courant max.	Max. current	Max. Strom	A	1		

خصائص تقنية	Especif. técnicas	Especif. técnicas	Caract. techniq.	Tech. specif.	Tech. Daten		5133 AZS223FN	5134 AZS227FN
نطاق الترددات	Margen freq.	Margem freq.	Marge fréq.	Freq. range	Frequenzbereich	MHz	5 - 2400	
نوع	Tipo	Tipo	Type	Type	Typ		C	D
خسائر الاشتقاق	Pérdidas derivación	Perdas derivação	Pertes dérivation	Tap loss	Abzweig-dämpfung	MATV	23	27
						IF	23	27
خسائر المرور	Pérdidas paso	Perdas paso	Pertes passage	Loss IN-OUT	Durchgangsdämpfung	MATV	1	1
						IF	1.5	1
فصل	Desacoplo	Desacopl.	Découplage	Out-Tap isolation loss	Entkopplung Abzweig-ausgänge-Ausgang	MATV	> 42	> 50
						IF	> 35	> 35
الرفض بين الاشتقاقات	Rech. entre derivac.	Rejeiç. entre derivaç.	Réjéct entre dérivation	Rejection between taps	Entkopplung Abzweig-ausgänge	MATV/ FI	> 30	
تيار الذروة	Corriente máx.	Corrente max.	Courant max.	Max. current	Max. Strom	A	1	

Aplicación


Aplicação

Application

Application

Anwendung

تطبيق

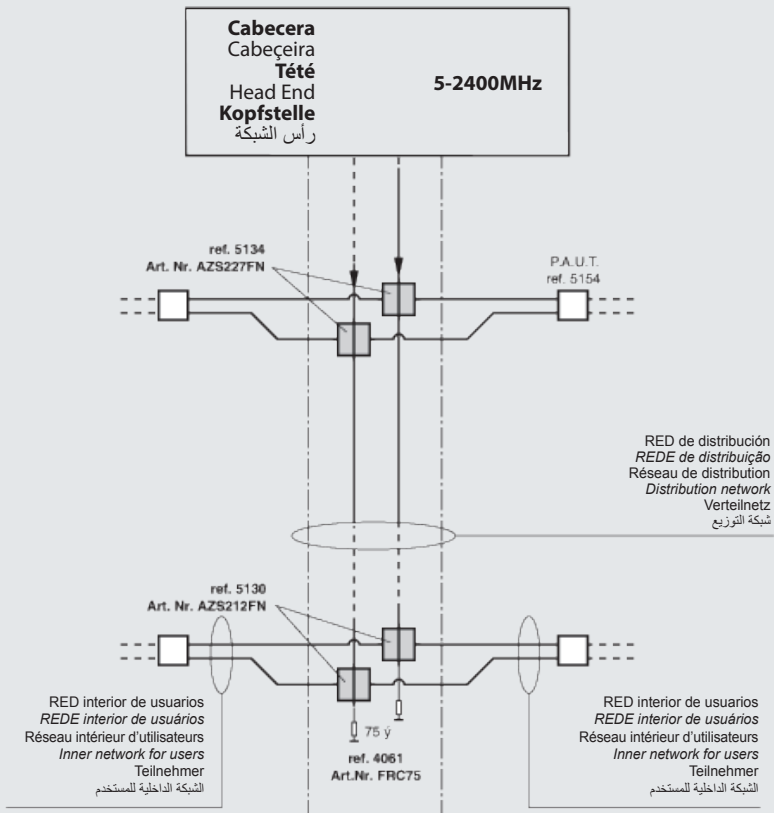

-----  
DECLARACIÓN DE CONFORMIDAD ■ DECLARATION OF CONFORMITY ■ DECLARAÇÃO DE CONFORMIDADE ■ DECLARATION DE CONFORMITE ■  
DICHIARAZIONE DI CONFORMITÀ ■ DEKLARACJA ZGODNOŚCI ■ KONFORMITÄTSEKTLÄRUNG ■ ΠΙΣΤΟΠΟΙΗΤΙΚΟ ΣΥΜΜΟΡΦΩΣΗΣ ■ FÖRSÄKRAN OM  
ÖVERENSSTÄMMELSE ■ ДЕКЛАРАЦИЯ СООТВЕТСТВИЯ ■ بيان المطابقة ► <https://doc.televes.com>  
-----

Televes S.A. Rúa B. de Conxo, 17 - 15706 Santiago de Compostela - Spain Tel.: +34 981 522200 www.televes.com

