



"F" Power Supply Unit 12 V - 220 mA, 2 outputs

Domestic 12 V-power supply (220 mA) that powers equipment through the input coaxial cable while allowing the transmission of the TV signal. Included in the installation to power either mast amplifiers or a BOSS system. Furthermore, it is equipped with two outputs.

Ref.	550101
Logical ref.	NT12F
EAN13	8424450139332

Packing

Box	1 pcs.
------------	--------

Physical data

Net weight	281.00 g
Gross weight	281.00 g
Width	146.00 mm
Height	54.00 mm
Depth	35.00 mm
Main product weight	221.00 g

Highlights


- High-performance switched-mode power supply: saves up to 40% power consumption
- Low-impact visual design and limited size
- "F" connectors

- Fully automated manufacturing, subject to the most stringent quality controls

Main features

- Can be wall-mounted using screws
- Through losses may vary depending on whether 1 or 2 outputs are used

Application example

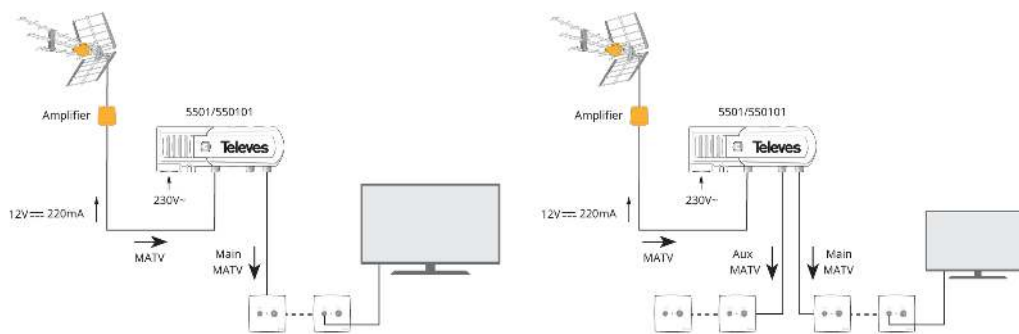

Technical specifications : Ref. 550101

Plug type		EU
Number of outputs		2
Frequency range	MHz	5 ... 862
Insertion losses: 1 output	dB	1.5
Insertion losses: 2 outputs	dB	4
Output voltage	Vdc	12
Max. output current	mA	220
Input voltage	Vac	207 ... 253
Mains frequency		50 Hz / 60 Hz
Max. current	mA	30
Max. power consumption	W	3.7
Operating temperature	°C	-5 ... 45
Protection index		20