



SK2020plus Coaxial cable, 18AtC B2ca Euroclass, A++ Class shielded

RG-6 coaxial cable with both conductors made of copper (Cu/Cu) and excellent braid coverage (82%). Triple shielded (TSH) cable, equipped with a second foil for extra shielded. An 18AtC cable with UV-resistant LSFH (Low Smoke, Free of Halogen) sheath.

Ref.	413910
Logical ref.	SK2020PLUS
EAN13	8424450190524

Other features

Colour	White
Length	100.00 m

Packaging info

Reel	100 m
Box	500 m
Pallet	6000 m

Physical data

Net weight	56.00 g
Gross volume	0.12 dm ³
Gross weight	56.00 g
Width	7.00 mm
Height	1,000.00 mm
Depth	7.00 mm
Main product weight	56.00 g

Highlights

- Copper conductors
- Class A++ shielded
- B2ca-s1a,d1,a1 Euroclass: one of the top cable categories - given its performance and fire resistance
- External UV-resistant LSFH sheath, white colour, recommended for outdoor rooftop use
- 75 Ohm characteristic impedance
- Available in reels of different lengths

Discover

Class A++ Trishield (TSH) coaxial cable

With three shielding layers (Trishield), this cables provide the highest immunity to interference thanks to its very high shielding. Recommended in cases of high electromagnetic noise levels.

They belong in EN 50117 standard Class A++, according to their structural properties:


- For 5 MHz - 30 MHz => TI < 0.9 mΩ/m
- For 30 MHz - 1000 MHz => SA > 105 dB
- For 1000 MHz - 2000 MHz => SA > 95 dB
- For 2000 MHz - 3000 MHz => SA > 85 dB

Where the transfer impedance (TI) defines how effective the shielding is at low frequencies, while the shielding attenuation (SA) defines it in the 30 MHz-to-3000 MHz range.

Mounting details

DETAIL VIEW OF THE COAXIAL CABLE SECTION

- A-Inner conductor
- B-Dielectric
- C-Foil
- D-Braid
- E-Second foil
- F-Outer sheath

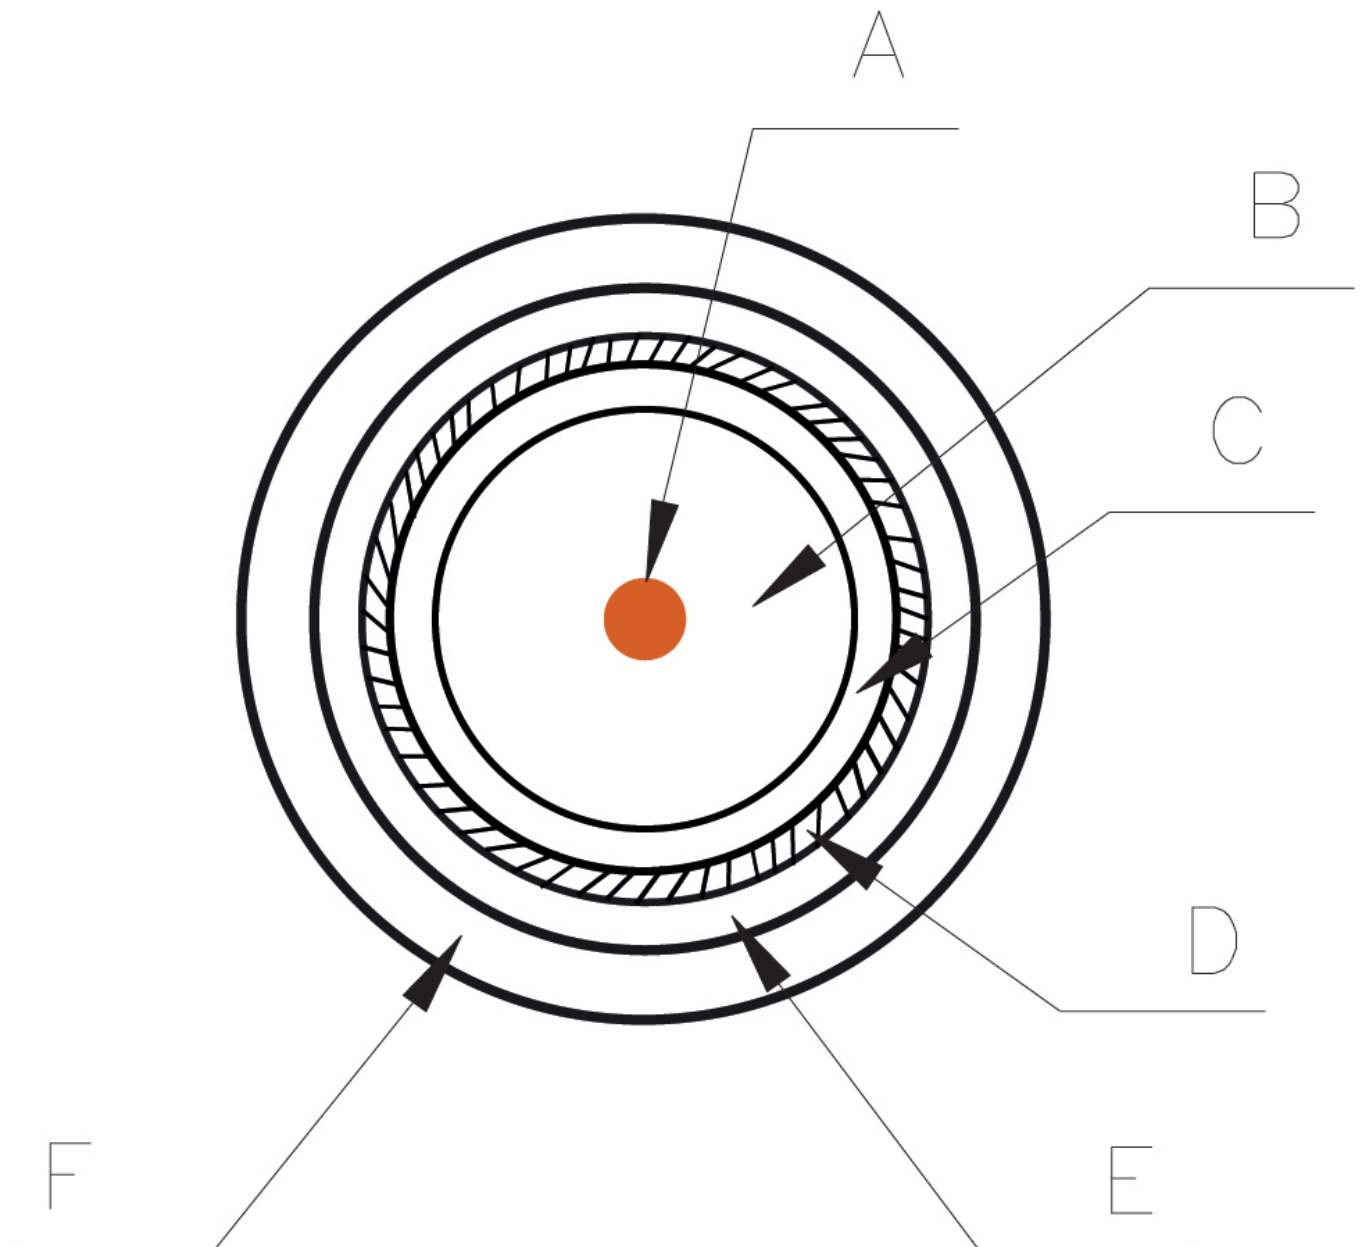

Technical specifications : Ref. 413910

Model		SK2020plus
Cable type		RG-6
Standard		EN 50117-9-2
Euroclass		B2ca
Euroclass: Smoke Production		s1a
Euroclass: Flaming droplets		d1
Euroclass: Acidity		a1
Class		A++
Inner conductor Diameter	in	0,041
Inner conductor Material		Copper (Cu)
Inner conductor Resistance	Ohm/km	< 22
Dielectric Diameter	in	0,183
Dielectric Material		Foam polyethylene (PEE)
Dielectric Color		Orange RAL 1007
Overlapped foil		Aluminium + Polyester
Braid Material		Tinned copper (CuSn)
Braid dimensions: No. of carriers (Nc)		24
Braid Dimensions: No. of strands per carrier (Ns)		7
Braid Dimensions: strand diameter (Ø)	in	0.004
Braid Resistance	Ohm/km	< 10.5
Braid Coverage	%	82
2nd foil		Yes
2nd foil glued to the dielectric		No
Petrol-Jelly		No
Anti-migrating film		No
Outer sheath Diameter	in	0.272
Outer sheath Material		LSFH, UV-resistant
Minimum bending radius	in	1,358
Transfer impedance (5-30MHz)	mΩ /m	< 0,9
1GHz shielding	dB	> 105
Spark Test	Vac	3000
Capacitance	pF/m	54
Impedance	Ω	75
Velocity ratio	%	84
Operating temperature	°F	-13 ... 158
Atenuacion 5MHz	dB/m	0.02
Atenuacion 47MHz	dB/m	0.04
Atenuacion 54MHz	dB/m	0.05
Atenuacion 90MHz	dB/m	0.06
Atenuacion 200MHz	dB/m	0.09
Atenuacion 500MHz	dB/m	0.14
Atenuacion 698MHz	dB/m	0.17
Atenuacion 800MHz	dB/m	0.18
Atenuacion 862MHz	dB/m	0.19
Atenuacion 950MHz	dB/m	0.2
Atenuacion 1000MHz	dB/m	0.21
Atenuacion 1220MHz	dB/m	0.23
Atenuacion 1350MHz	dB/m	0.25
Atenuacion 1750MHz	dB/m	0.28
Atenuacion 2050MHz	dB/m	0.3
Atenuacion 2150MHz	dB/m	0.31
Atenuacion 2200MHz	dB/m	0.32
Atenuacion 2300MHz	dB/m	0.32
Atenuacion 2400MHz	dB/m	0.33
Atenuacion 3000MHz	dB/m	0.36
Return losses 5MHz	dB	23
Return losses 47MHz	dB	23
Return losses 54MHz	dB	23
Return losses 90MHz	dB	23
Return losses 200MHz	dB	23
Return losses 500MHz	dB	20
Return losses 698MHz	dB	20
Return losses 800MHz	dB	20
Return losses 862MHz	dB	20
Return losses 950MHz	dB	18
Return losses 1000MHz	dB	18
Return losses 1220MHz	dB	18
Return losses 1350MHz	dB	18
Return losses 1750MHz	dB	18
Return losses 2050MHz	dB	18
Return losses 2150MHz	dB	18
Return losses 2200MHz	dB	18
Return losses 2300MHz	dB	18
Return losses 2400MHz	dB	18
Return losses 3000MHz	dB	18