Top Tray with 2 fans for Rack 19" - 600mm depth, 390m3/h

2-fan tray that is installed on the top of a rack cabinet to force the cooling of the structure. This creates an air stream inside the cabinet, facilitating heat dissipation from the electronical components installed inside and maintaining a suitable temperature range.

Two operating modes:

- Continuous mode: Ventilation remains active without interruption.
- Thermostat-controlled: Ventilation is activated by a thermostat that monitors the internal rack temperature, preventing it from exceeding the preselected value.

Mounted on a square structure, it is compatible with 19" floor standing racks 600x600mm. It includes screws for fixing.

Ref.	533175
Logical ref.	MSR-L600
EAN13	8424450237649

Packaging info

Box	1 pcs.

Physical data

Net weight	2,242.00 g
Gross volume	12.92 dm³

Gross weight	2,816.00 g
Width	451.00 mm
Height	40.00 mm
Depth	365.00 mm
Main product weight	2,242.00 g

Highlights

- Two fans with a powerful air flow: 390 m^3/hour
- Dual installation options: Can be mounted on the ceiling or floor, creating greater airflow inside the rack
- Simple installation: screws are supplied for the installation of the tray
- Continuous or thermostat-controlled operating mode
- Resistant tray made of 1mm thick steel
- Connector: IEC C14
- Dimensions (W x D x H): 451x365x40 mm
- Black colour (RAL 9005)

Mounting details

Fans are located in a screwed tray at the top of the rack, in this way they extract the hot air released by the equipment inside the rack and expel it through the slits at the top. Thus, the fans force air circulation, the new one entering through the bottom of the cabinet.

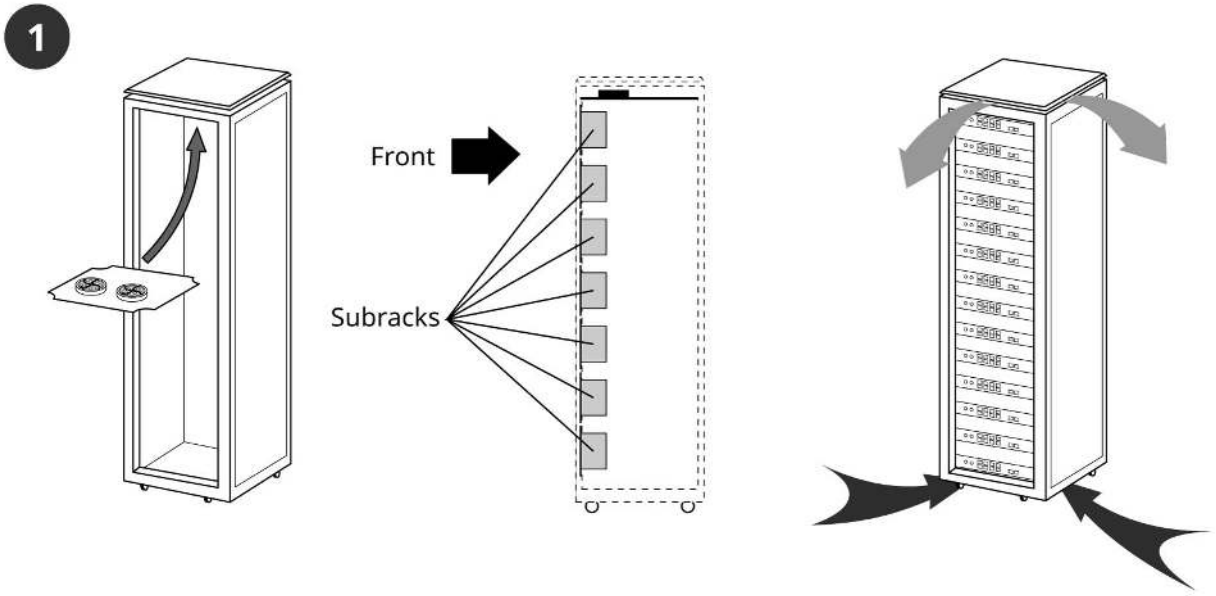
1
Front
Subracks

Technical specifications : Ref. 533175

Number of fans		2
Fan model		Axial
Voltage max.	Vac	240
Input voltage	Vac	220 ... 230
Mains frequency		50 Hz / 60 Hz
Max. current 1 fan	A	0.08
Max. current 2 fan	A	0.16
Max. power consumption	W	36
Installation type		Ground / Ceiling
Protective housing		Yes
Air flow	m^3/h	390
Noise emission	dBA	56