“F” Power Supply Units (UL certified) 12 V - 220 mA, 2 outputs



Domestic 12 V-power supply (220 mA) that powers equipment through the input coaxial cable while allowing the transmission of the TV signal. Included in the installation to power either mast amplifiers or a BOSS system. Furthermore, it is equipped with two outputs.
The power supply is UL certified (US plug).

Ref.	550104
EAN13	8424450155219

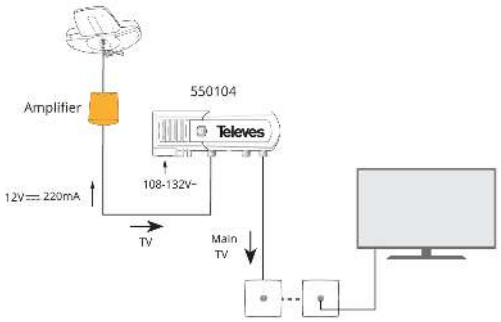
Packaging info	
Box	1 pcs.
Bucket	109 pcs.

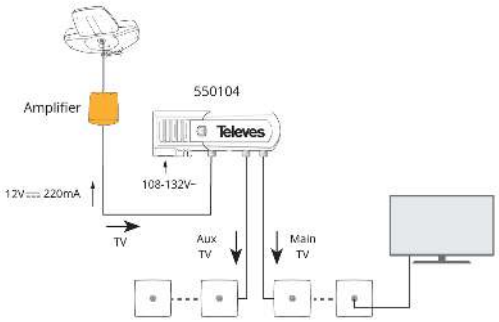
Physical data	
Net weight	292.00 g
Gross volume	0.60 dm³
Gross weight	310.00 g
Width	146.00 mm
Height	54.00 mm
Depth	35.00 mm
Main product weight	219.00 g

Highlights

- High-performance switched-mode power supply: saves up to 40% power consumption
- Low-impact visual design and limited size
- “F” connectors
- Fully automated manufacturing, subject to the most stringent quality controls
- Can be wall-mounted using screws
- Through losses may vary depending on whether 1 or 2 outputs are used

Application example


Amplifier
550104
Televes
108-132V~
12V ⎓ 220mA
TV
Main
TV


Amplifier
550104
Televes
108-132V~
12V ⎓ 220mA
TV
Aux
TV
Main
TV

Technical specifications : Ref. 550104

Plug type		US
Number of outputs		2
Frequency range	MHz	5 ... 862
Insertion losses: 1 output	dB	1.5
Insertion losses: 2 outputs	dB	4
Output voltage	Vdc	12
Max. output current	mA	220
Input voltage	Vac	108 ... 132
Mains frequency		50 Hz / 60 Hz
Max. current	mA	65
Max. power consumption	W	3.6
Operating temperature	°F	14 ... 113
Protection index (IP)		20