

## Lower section pivoting, Zinc + Painting 180 tower

3m lower section for the erection of a 180 series tower.

Guy wires are required for pivoting sections.

The section is painted white.

---

<b>Ref.</b>	303702
<b>EAN13</b>	8424450152416

---

### Other features

---

<b>Colour</b>	White
<b>Finishing</b>	Zinc + White painted

---

### Packing

---

<b>Unit</b>	1 pcs.
-------------	--------

---

### Physical data

---

<b>Net weight</b>	12,500.00 g
<b>Gross weight</b>	12,500.00 g
<b>Width</b>	180.00 mm
<b>Height</b>	3,000.00 mm
<b>Depth</b>	165.00 mm
<b>Main product weight</b>	12,796.00 g

---

### Highlights

- Anchoring system with union nuts
- Easy and quick mounting
- Fully automated soldering
- 180 tower maximum height: 26.5m (as per calculation conditions)

## Main features


---

- Zinc coating + colour paint: oven-lacquering with polyester electrostatic powder

## Mounting details

---

It consists in fixing the lower section to the base, set it in upright position and levelling it. The subsequent Middle Sections are then mounted, equipped with the appropriate guy wires; the mounting is carried out by climbing on the previously mounted sections and hoisting the new section with the help of the appropriate lifting tools.

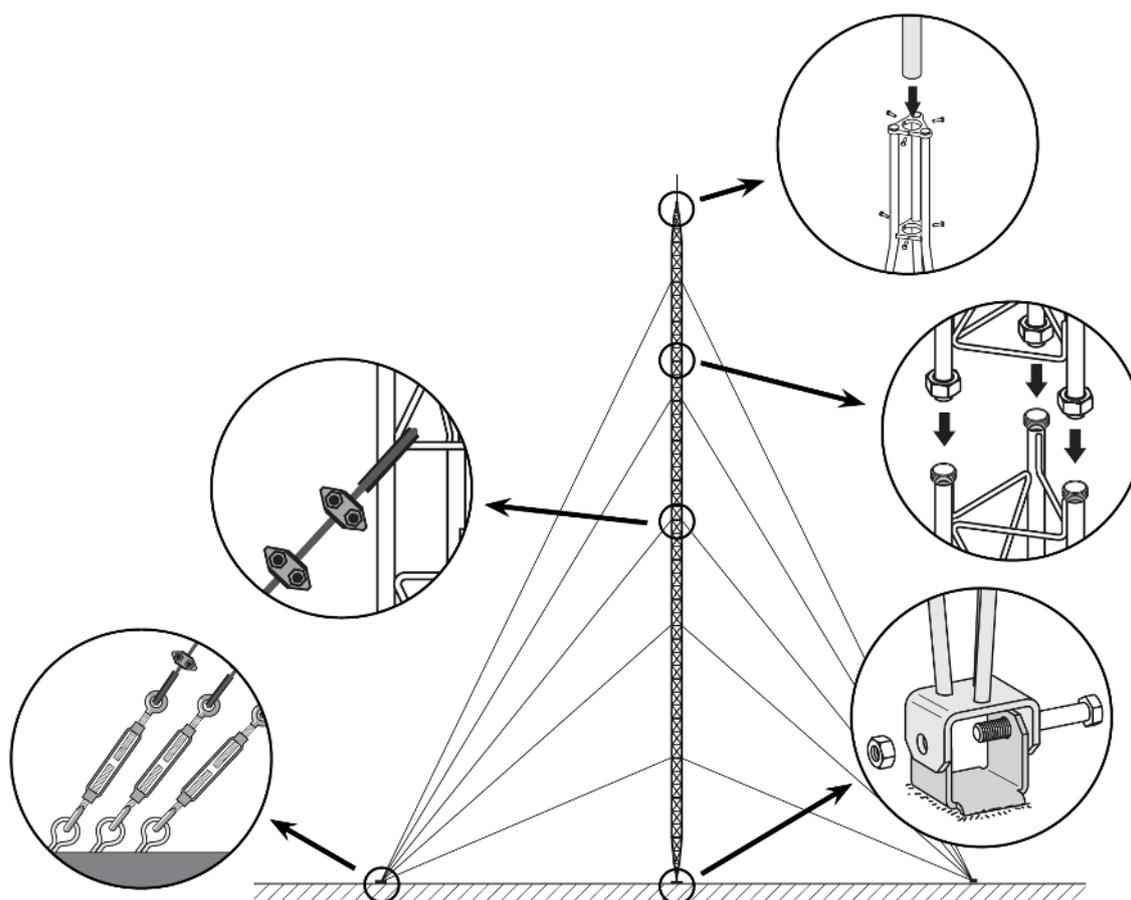

## Technical specifications : Ref. 303702

Surface facing the wind	m <sup>2</sup>	0.274
-------------------------	----------------	-------